

# Hand Painted Globes

AIP12397

**SPI**LIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

### In-House Artisans | 3 Marble Looks | 7 Diameters

Discover the exquisite fusion of art and craft with our Hand Painted Globes. Each pendant is a unique piece of art, meticulously hand-painted to resemble the elegance of marble, transforming any room into an oasis of sophistication.

#### FEATURES & BENEFITS

- Hand painted diffusers provide one-of-a-kind pendants for a unique look
- Three marble looks to blend with a multitude of architectural types
- Seven diameters for a wide range of design options including single pendants and clustered configurations
- All visible fasteners are flush mounted
- Handcrafted in USA, BABA Compliant

#### SPECIFICATIONS


- **LIGHT SOURCE:** Static white, tunable white, or RGBW LED light engine
- **CRI:** 80+, 90+
- **LUMEN MAINTENANCE:** L80 = >60,000 Hrs.
- **EFFICACY:** 60 lm/W
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K (static white); 2700K-6500K (tunable white); 3000K (RGBW)
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard for white light engines. RGBW has a remote DMX driver; max distance to the driver is 15' (includes OAH).
- **DIMMING:** 0-10V controls standard to 1% on static white light engines. DALI-2 (DT8) standard for tunable white. DMX standard for RGBW. Other dimming options are available; contact factory.
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper,



WaveLinx, or Casambi

- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **INTEGRATED SURGE PROTECTION:** LED components are protected against minor surge events
- **DIFFUSER:** One-piece, molded acrylic with hand painted finish. UV inhibitor combined with acrylic before molding.
- **CONSTRUCTION:** Aluminum housing
- **FINISH:** Housing and mounting components finished to match. To specify separately, contact factory. Choose from 26 standard thermoset polyester powder coat paint colors, brushed aluminum, or brass finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests, including different sizes
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

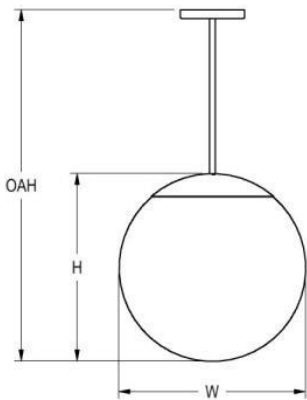

10IN	W	H	OAH
	10 in	10 in	58 in
	25.4 cm	25.4 cm	147.3 cm

Mounting Weight:Approximate: 5 lb (3 kg)

12IN	W	H	OAH
	12 in	12 in	60 in
	30.5 cm	30.5 cm	152.4 cm

Mounting Weight:Approximate: 5 lb (3 kg)

14IN	W	H	OAH
	14 in	14 in	62 in
	35.6 cm	35.6 cm	157.5 cm

Mounting Weight:Approximate: 6 lb (3 kg)

16IN	W	H	OAH
	16 in	16 in	64 in
	40.6 cm	40.6 cm	162.6 cm

Mounting Weight:Approximate: 7 lb (4 kg)

18IN	W	H	OAH
	18 in	18 in	66 in
	45.7 cm	45.7 cm	167.6 cm

Mounting Weight:Approximate: 8 lb (4 kg)

20IN	W	H	OAH
	20 in	20 in	68 in
	50.8 cm	50.8 cm	172.7 cm

Mounting Weight:Approximate: 10 lb (5 kg)

22IN	W	H	OAH
	22 in	22 in	70 in
	55.9 cm	55.9 cm	177.8 cm

Mounting Weight:Approximate: 11 lb (5 kg)

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AIP12397](http://www.spilighting.com/AIP12397). Not all options are available in all configurations; consult factory for details.

Required Field \*

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Mounting*	Options	Other Than Standard Options
AIP12397									
	A		B	C	D	E	F	G	H

A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. White light engines are available in alternative wattages upon request.

10 INCH DIAMETER FIXTURE

- ☐ 10IN-L5W | Static White 5W LED Light Engine | Delivered Lumens: 300
- ☐ 10IN-L5W-T | Tunable White 5W LED Light Engine | Delivered Lumens: 300
- ☐ 10IN-10W | Static White 10W LED Light Engine | Delivered Lumens: 600
- ☐ 10IN-L10W-T | Tunable White 10W LED Light Engine | Delivered Lumens: 600
- ☐ 10IN-L9W-C <sup>1</sup> | RGBW 9W LED Light Engine | Delivered Lumens: 0

12 INCH DIAMETER FIXTURE

- ☐ 12IN-L7W <sup>1</sup> | Static White 7W LED Light Engine | Delivered Lumens: 420
- ☐ 12IN-L7W-T <sup>1</sup> | Tunable White 7W LED Light Engine | Delivered Lumens: 420
- ☐ 12IN-L14W <sup>1</sup> | Static White 14W LED Light Engine | Delivered Lumens: 840
- ☐ 12IN-L14W-T <sup>1</sup> | Tunable White 14W LED Light Engine | Delivered Lumens: 840
- ☐ 12IN-L14W-C <sup>1</sup> | RGBW 14W LED Light Engine | Delivered Lumens: 0

14 INCH DIAMETER FIXTURE

- ☐ 14IN-L10W <sup>1</sup> | Static White 10W LED Light Engine | Delivered Lumens: 600
- ☐ 14IN-L10W-T <sup>1</sup> | Tunable White 10W LED Light Engine | Delivered Lumens: 600
- ☐ 14IN-L19W <sup>1</sup> | Static White 19W LED Light Engine | Delivered Lumens: 1,140
- ☐ 14IN-L19W-T <sup>1</sup> | Tunable White 19W LED Light Engine | Delivered Lumens: 1,140
- ☐ 14IN-L22W-C <sup>1</sup> | RGBW 22W LED Light Engine | Delivered Lumens: 0

16 INCH DIAMETER FIXTURE

- ☐ 16IN-L12W <sup>1</sup> | Static White 12W LED Light Engine | Delivered Lumens: 720
- ☐ 16IN-L12W-T <sup>1</sup> | Tunable White 12W LED Light Engine | Delivered Lumens: 720
- ☐ 16IN-L24W <sup>1</sup> | Static White 24W LED Light Engine | Delivered Lumens: 1,440
- ☐ 16IN-L24W-T <sup>1</sup> | Tunable White 24W LED Light Engine | Delivered Lumens: 1,440
- ☐ 16IN-L29W-C <sup>1</sup> | RGBW 29W LED Light Engine | Delivered Lumens: 0

18 INCH DIAMETER FIXTURE

- ☐ 18IN-L16W <sup>1</sup> | Static White 16W LED Light Engine | Delivered Lumens: 960
- ☐ 18IN-L16W-T <sup>1</sup> | Tunable White 16W LED Light Engine | Delivered Lumens: 960

- ☐ **18IN-L31W**<sup>1</sup> | Static White 31W LED Light Engine | Delivered Lumens: 1,860
- ☐ **18IN-L31W-T**<sup>1</sup> | Tunable White 31W LED Light Engine | Delivered Lumens: 1,860
- ☐ **18IN-L36W-C**<sup>1</sup> | RGBW 36W LED Light Engine | Delivered Lumens: 0

## 20 INCH DIAMETER FIXTURE

- ☐ **20IN-L20W**<sup>1</sup> | Static White 20W LED Light Engine | Delivered Lumens: 1,200
- ☐ **20IN-L20W-T**<sup>1</sup> | Tunable White 20W LED Light Engine | Delivered Lumens: 1,200
- ☐ **20IN-L39W**<sup>1</sup> | Static White 39W LED Light Engine | Delivered Lumens: 2,340
- ☐ **20IN-L39W-T**<sup>1</sup> | Tunable White 39W LED Light Engine | Delivered Lumens: 2,340
- ☐ **20IN-L43W-C**<sup>1</sup> | RGBW 43W LED Light Engine | Delivered Lumens: 0

## 22 INCH DIAMETER FIXTURE

- ☐ **22IN-L24W**<sup>1</sup> | Static White 24W LED Light Engine | Delivered Lumens: 1,440
- ☐ **22IN-L24W-T**<sup>1</sup> | Tunable White 24W LED Light Engine | Delivered Lumens: 1,440
- ☐ **22IN-L46W**<sup>1</sup> | Static White 46W LED Light Engine | Delivered Lumens: 2,760
- ☐ **22IN-L46W-T**<sup>1</sup> | Tunable White 46W LED Light Engine | Delivered Lumens: 2,760
- ☐ **22IN-L50W-C**<sup>1</sup> | RGBW 50W LED Light Engine | Delivered Lumens: 0

See last page for finish options

<sup>1</sup> RGBW delivered lumens shown are for white only at 3000K

## B - VOLTAGE \*

- ☐ 120-277V | Universal Voltage

## C - LAMP OPTIONS \*

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT
- ☐ TUN | Tunable White 2700K-6500K CCT
- ☐ RGBW<sup>2</sup> | RGBW 3000K CCT


<sup>2</sup> Use DMX/DALI programming for alternate color temps; see programming guide

## D - CRI \*

- ☐ DF\_80 | (default)
- ☐ 90

E - DIFFUSER \*

- ☐ HP01 | Silver Hand Painted Acrylic Lens
- ☐ HP02 | Beige Hand Painted Acrylic Lens
- ☐ HP03 | Amber Hand Painted Acrylic Lens

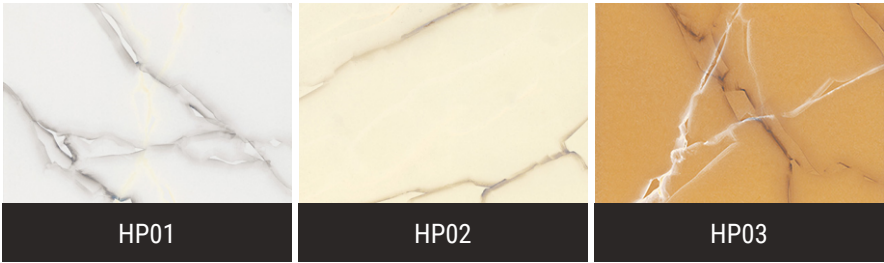

F - MOUNTING \*

- ☐ CAA | 5" Canopy & Aircraft Cable, Remote Supply
- ☐ CAS | 5.5" Canopy & Stem, Remote Supply
- ☐ PSA | 10" Power Supply Canopy & Aircraft Cable
- ☐ PSS | 10" Power Supply Canopy & Stem

G - OPTIONS

- ☐ F | Fusing

H - OTHER THAN STANDARD OPTIONS

OAH | Pendant suspension length other than standard

Length:

For Tunable White or RGBW, see Driver section for any exceptions.

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

### Brushed Aluminum

<b>BAL</b> Brushed Aluminum
--------------------------------

### Brushed Brass

<b>BBR</b> Brushed Solid Brass
-----------------------------------

### Polished-Tinted Brass

<b>ATBR</b> Antique Tinted Brass	<b>DTBR</b> Dark Tinted Brass	<b>PBR</b> Polished Brass
-------------------------------------	----------------------------------	------------------------------

### Polished Plated Brass

<b>CPBR</b> Chrome Plated Polished Brass	<b>SNBR</b> Satin Nickel Plated Brass
---	--

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.