Madrid - Pendant

AIP8508 21.50 in

SPI LIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Our shallow bowl collection offers simple classic lines in a low-profile alternative. When low to mid-height ceiling applications present themselves, this family complements contemporary and transitional styling. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance the visual environment you're creating.

FEATURES & BENEFITS

- Opal acrylic diffuser enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- Optional finial available
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT**: 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Opal acrylic is standard; matte acrylic and hand painted lenses optional. Any upward facing LEDs will be covered with a protective lens.
- **TOP LENS:** Any upward facing LEDs will be covered with a protective lens
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use

in damp locations; not recommended for exterior applications

DIMENSIONS

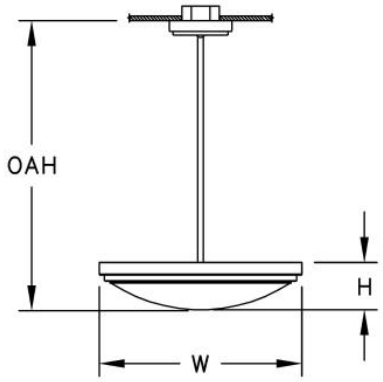

W	H	OAH
21.5 in 54.6 cm	5 in 12.7 cm	30.5 in 77.5 cm

Mounting Weight
Approximate: 50 lb (23 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIP8508. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Diffuser*	Voltage*	Lamp Options*	CRI*	Mounting*	Emergency	Bowl Options	Options	Other Than Standard Options
AIP8508									Finish:	Finish:	
	A		B	C	D	E	F	G	H	I	J

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

☐ **L50W |** White 50W LED Light Engine | Delivered Lumens: 4,968

☐ **L100W |** White 100W LED Light Engine | Delivered Lumens: 9,935

☐ **Cust_Out |**

Lumen Calculator: Enter Lumens or Watts if different than displayed

LU Min 4950 - Max 9900

W Min 50.0 - Max 100.0

See last page for finish options

*For requests outside Min-Max range, please contact factory.

B - DIFFUSER *

- ☐ DF_OA | Opal Acrylic Diffuser Lens (default)
- ☐ HP01 | Silver Hand Painted Acrylic Diffuser
- ☐ HP02 | Beige Hand Painted Acrylic Diffuser
- ☐ HP03 | Amber Hand Painted Acrylic Diffuser
- ☐ MA01 | Matte Acrylic Diffuser Lens

OA


HP01


HP02

HP03


MA01

C - VOLTAGE *

- ☐ 120-277V | Universal Voltage

D - LAMP OPTIONS *

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

E - CRI *

- ☐ DF_90+HE | 90+ High Efficacy

F - MOUNTING *

Mounts to standard 4" octagonal junction box with auxiliary mounting holes. Canopy is 6.5" diameter with a 45 degree swivel.

- ☐ DF_STM | Stem Mount (default)

G - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ EMR | Emergency Battery Remote

H - BOWL OPTIONS

- ☐ FIN | Finial (See last page for finish options)

I - OPTIONS

- ☐ KA01 | Angled Aircraft Cable Kit (to Transition Plate/Canopy) (See last page for finish options)
- ☐ KR01 | Angled Stem Multi Kit (to Transition Plate) (See last page for finish options)
- ☐ KS01 | Straight Stem Multi Kit (to Transition Plate) (See last page for finish options)
- ☐ F | Fusing

KA01

KR01

KS01

J - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard Length:

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	**PT51** Matte White (Textured)	**PT02** White (Textured)	**PT04** RAL9001 Cream (Textured)	**PT67** RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	**PT54** RAL7037 Dusty Grey (Textured)	**PT55** RAL7012 Basalt Grey (Textured)	**PT56** RAL7016 Anthracite Grey (Textured)	**PT11** Black (Textured)
PT57 RAL1015 Light Ivory (Textured)	**PT58** RAL8004 Copper Brown (Textured)	**PT59** RAL6021 Pale Green (Textured)	**PT60** RAL1019 Grey Beige (Textured)	**PT61** RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	**PT63** RAL3001 Signal Red (Textured)	**PT64** RAL6001 Emerald Green (Textured)	**PT65** RAL5005 Signal Blue (Textured)	**PT66** RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	**PT48** Brass (Metallic Textured)	**PT28** Dark Stainless (Metallic Gloss)	**PT49** Bronze (Metallic Textured)	**PT32** Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Brushed Aluminum

BAL Brushed Aluminum

Brushed Brass

BBR Brushed Solid Brass

Polished-Tinted Brass

ATBR Antique Tinted Brass	**DTBR** Dark Tinted Brass	**PBR** Polished Brass

Plated Steel

ANST Antique Brass Plated Steel	**BBST** Brushed Brass Plated Steel	**CPST** Chrome Plated Steel	**PBST** Polished Brass Plated Steel	**SNST** Satin Nickel Steel

Polished Plated Brass

CPBR Chrome Plated Polished Brass	**SNBR** Satin Nickel Plated Brass

Specialty Finishes

More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.