

INACTIVE SPEC SHEET

Ontario - Pendant

AIP8889 20.50 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

The ultra-thin circular housing creates a clean, floating appearance suitable for open office spaces, corridors, conference rooms, and lobbies. Pendants, wall mounts, ADA sconces, and ceiling luminaires are all available within this family. Ontario's unique optical system provides an efficient indirect light solution with uniform ceiling brightness, even in low-ceiling spaces. The Ontario family is a versatile lighting alternative for demanding applications.

FEATURES & BENEFITS


- Spun metal housing adds high-quality, decorative element to fixture.
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ (contact factory for 90+)
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 3000K, 3500K, or 4000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- **EMERGENCY:** Emergency battery remote optional
- **TOP LENS:** Any upward facing LEDs will be covered with a protective lens
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications



DIMENSIONS

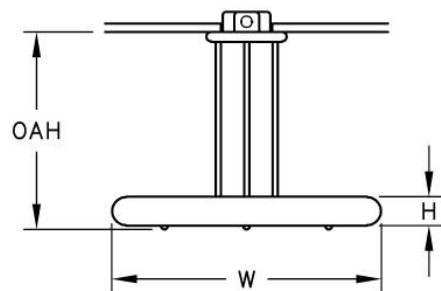

| | | |
|----------------------------|----------|------------|
| W | H | OAH |
| 20.5 in | 2 in | 15 in |
| 52.1 cm | 5.1 cm | 38.1 cm |
| Mounting Weight | | |
| Approximate: 50 lb (23 kg) | | |

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIP8889. Not all options are available in all configurations; consult factory for details.

Required Field *

| | | | | | | | | | |
|---------|---------------|-----------------|----------|---------------|-----------|--------|------|---------|-----------------------------|
| Catalog | Light Source* | Primary Finish* | Voltage* | Lamp Options* | Mounting* | Canopy | Lens | Options | Other Than Standard Options |
| AIP8889 | | | | | | | | | |
| | A | | B | C | D | E | F | G | H |

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

- ☐ **L86W** | White 86W LED Light Engine
- ☐ **L43W** | White 43W LED Light Engine

See last page for finish options

B - VOLTAGE *

- ☐ **120-277V** | Universal Voltage

C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.

- ☐ **3000K** ¹ | 3000K CCT
- ☐ **3500K** ² | 3500K CCT
- ☐ **4000K** | 4000K CCT


¹ Apply .95 multiplier for delivered lumens

² Apply .97 multiplier for delivered lumens

D - MOUNTING *

Mounts to standard 4" octagonal junction box.

- ☐ DF_STM | Stem Mount (default)
- ☐ KA02 | Straight Aircraft Cable Mount
- ☐ KA04 | Angled Aircraft Cable Mount

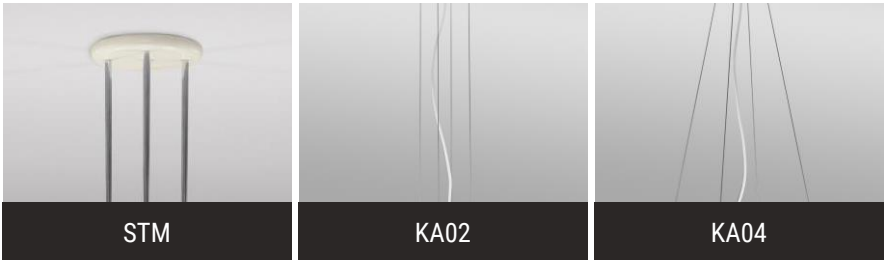

E - CANOPY

- ☐ SAM30 | 30" Swivel Canopy
- ☐ SAM40 | 45" Swivel Canopy

F - LENS

- ☐ AD01 | Flat Sandblasted Disk
- ☐ AD02 | Cone Disk
- ☐ AD03 | Bowl Disk



G - OPTIONS

- ☐ F | Fusing

H - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture. The OAH min/max range is determined only by the physical limitations of the luminaire. Appropriate mounting heights are separately calculated from photometric lighting layouts and recommended from the specifier. If the specified mounting height is outside of the OAH range, please contact the factory.

OAH | Pendant suspension length other than standard

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

| | | | | |
|---|---------------------------------------|---------------------------------|---|---------------------------------|
| PT01 RAL9003 Signal White (Gloss) | PT51 Matte White (Textured) | PT02 White (Textured) | PT04 RAL9001 Cream (Textured) | PT11 Black (Textured) |
|---|---------------------------------------|---------------------------------|---|---------------------------------|

Metallic Paint Colors

| | | | | |
|---|--|--|---|---|
| PT22 Platinum (Metallic Gloss) | PT48 Brass (Metallic Textured) | PT28 Dark Stainless (Metallic Gloss) | PT49 Bronze (Metallic Textured) | PT32 Dark Bronze (Metallic Gloss) |
| PT46 Aluminum (Metallic Textured) | | | | |

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.