

# Carmi

AIW11738 49.30 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION


Add visual interest to your spaces with this curved wall sconce. Its gentle change in depth complements contours in design and architecture. Available in 2', 3', and 4' foot lengths, Carmi is suitable for both small and large spaces. The standard white matte acrylic diffuser softly illuminates with no source tracing. Mounted vertically or horizontally, Carmi's modern design is ideal for corridors and vanity applications, or anywhere accent lighting is needed. This low-profile luminaire is compliant with the Americans with Disabilities Act (ADA) requirements.

## FEATURES & BENEFITS

- Complement your modern designs with this cleanly designed fixture featuring no visible fasteners
- White matte acrylic diffuser spreads light evenly across the entire lens, minimizing shadowing and hot spots
- Eliminate the need to locate, mount, and wire remote equipment with standard Integral Class II power supply
- Handcrafted in USA

## SPECIFICATIONS


- **LIGHT SOURCE:** White LED light engine
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** White matte acrylic diffuser standard; white gloss acrylic optional
- **CONSTRUCTION:** Aluminum construction provides durable

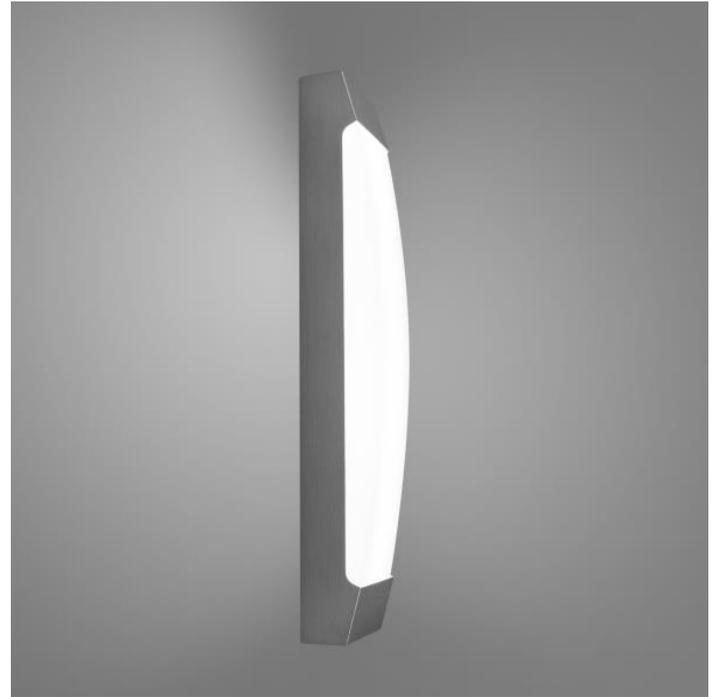

protection for internal components and is recyclable

- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or brushed aluminum finish. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

## DIMENSIONS

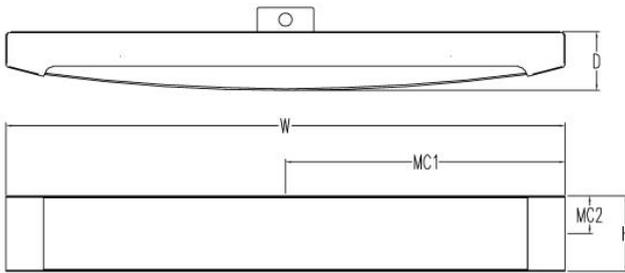

<b>W</b> 49.3 in 125.2 cm	<b>H</b> 5 in 12.7 cm	<b>D</b> 3.9 in 9.9 cm	<b>MC1</b> 24.6 in 62.5 cm	<b>MC2</b> 2.5 in 6.4 cm
---------------------------------	-----------------------------	------------------------------	----------------------------------	--------------------------------

**Mounting Weight**  
Approximate: 25 lb (12 kg)

## CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AIW11738](http://www.spilighting.com/AIW11738). Not all options are available in all configurations; consult factory for details.

### Required Field \*

Catalog AIW11738	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Emergency
	A		B	C	D	E	F

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

**L50W** | White 50W LED Light Engine | Delivered Lumens: 2,301

**L25W** | White 25W LED Light Engine | Delivered Lumens: 1,150

**Cust\_Out** |

**Lumen Calculator:** Enter Lumens or Watts if different than displayed

LU Min 1145 - Max 2290

W Min 25.0 - Max 50.0

[See last page for finish options](#)

\*For requests outside Min-Max range, please contact factory.

## B - VOLTAGE \*

---

120-277V | Universal Voltage

## C - LAMP OPTIONS \*

---

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- 2700K | 2700K CCT
- 3000K | 3000K CCT
- 3500K | 3500K CCT
- 4000K | 4000K CCT
- 5000K | 5000K CCT

## D - CRI \*

---

DF\_90+HE | 90+ High Efficacy

## E - DIFFUSER \*

---

- DF\_MA01 | Matte Acrylic Diffuser Lens (default)
- OA | White Gloss Acrylic Diffuser



## F - EMERGENCY

---

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

EMR | Emergency Battery Remote

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

### Brushed Aluminum

<b>BAL</b> Brushed Aluminum
--------------------------------

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.