

# Echo Effect - Wall Forward Wash

EEW12121 12.50 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

The Echo Effect with forward wash optic is a fully recessed exterior wall and step light designed with a smaller aperture size and premium optic materials to minimize visible brightness. It is an excellent choice for environments where reducing glare is a top priority, such as courtyards, pathways, and bridges. The optical solution spreads light evenly, producing a uniform distribution on the ground or to highlight stairs. Built to last, this IP67 rated luminaire features an aluminum or stainless steel faceplate, stainless steel external fasteners, and tempered glass.

## FEATURES & BENEFITS

- Optically engineered, precision LED optics control light distribution and direct light where it is needed
- Premium 95% reflective aluminum is utilized in the highly-efficient and effective reflector design
- All visible fasteners are flush mounted, providing a clean design
- Stainless steel external fasteners will not rust or corrode
- Recessed housing has anodized finish providing optimal thermal effectiveness and durable corrosion protection
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA, BABA Compliant




## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** This product is non-dimmable, contact factory to discuss options.
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi).

- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **CONSTRUCTION:** Tempered glass lens protects fixture lamp engine. Aluminum construction provides durable protection for internal components and is recyclable.
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Capable of 1/2 IP conduit connection.
- **APPROVALS:** ETL listed to UL standards (US and Canada) for poured concrete applications and use in wet locations. IP67 rated fixture per International Electrotechnical Commission (IEC) certifies fixture as dust-tight and protected against temporary immersion.

**ATTENTION!! CORD MUST RUN UNINTERRUPTED FROM THE FIXTURE TO A LIQUID TIGHT SPLICE ENCLOSURE (BY OTHERS). DO NOT CUT CORD AND MAKE SPLICE IN RECESSED BOX BEHIND FIXTURE. THIS BOX IS NOT LIQUID TIGHT. MAKING THE CONNECTION THERE WILL CAUSE THE PRODUCT TO FAIL AND VOID ITS WARRANTY.**

DIMENSIONS

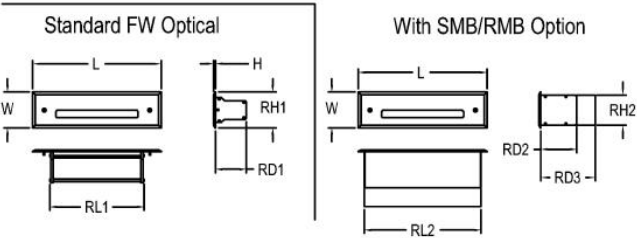

<b>W</b> 3.5 in 8.9 cm	<b>H</b> 0.2 in 0.5 cm	<b>L</b> 12.5 in 31.8 cm	<b>RD1</b> 3 in 7.6 cm	<b>RD2</b> 3.5 in 8.9 cm	<b>RD3</b> 5.3 in 13.5 cm	<b>RH1</b> 2.4 in 6.1 cm
<b>RH2</b> 3 in 7.6 cm	<b>RL1</b> 9.2 in 23.4 cm	<b>RL2</b> 11.3 in 28.7 cm				
<b>Mounting Weight</b> Consult Factory.						

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/EEW12121](http://www.spilighting.com/EEW12121). Not all options are available in all configurations; consult factory for details.

Required Field \*

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI	Emergency	Mounting Box*
EEW12121							
	A		B	C	D	E	F

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

☐ **L8W** | White 8W LED Light Engine | Delivered Lumens: 212

See last page for finish options

## B - VOLTAGE \*

☐ 120-277V | Universal Voltage

## C - LAMP OPTIONS \*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

## D - CRI

☐ 90+HE | 90+ High Efficacy

## E - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- ☐ EMR-DAMP | Emergency Battery Remote - Damp Location
- ☐ EMR-W/L | Emergency Battery Remote - Wet Location

## F - MOUNTING BOX \*

If requested, back boxes can ship ahead of fixtures.

- ☐ RMB <sup>1</sup> | Recessed Mount Box, 3' Lead Length
- ☐ SMB04 <sup>2</sup> | Shallow Mounting Box, 4' Lead Length
- ☐ SMB15 <sup>2</sup> | Shallow Mounting Box, 15' Lead Length
- ☐ SMB50 <sup>2</sup> | Shallow Mounting Box, 50' Lead Length

<sup>1</sup> RD3 = 5.3"

<sup>2</sup> RD2 = 3.5"

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Brushed Stainless

<b>BSS</b> Brushed Stainless Steel
---------------------------------------

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

### Brushed Aluminum

<b>BAL</b> Brushed Aluminum
--------------------------------

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.