

Echo Blade Micro Max - Exterior

EEW12449 9.00 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Smallest | Most Powerful | Most Versatile

4" x 9" x 4"

Up to 5000 lumens

Our Smallest, most powerful, and most versatile asymmetric lighting tool. Designed to be a discreet powerhouse, this fixture delivers up to 5,000 lumens, has 6 optical distributions, and can be utilized in both indirect and direct applications.

FEATURES & BENEFITS

- 4" x 9" x 4"
- ADA compliant
- Up to 5,000 delivered lumens
- 6 optical distributions
- Indirect and direct applications
- A true asymmetric with high-efficiency optics
- Efficacy up to 112 lm/W
- Optional backlight shield available
- Full horizontal cutoff
- Top lens removes striations and corrects for color-over-angle
- Handcrafted in USA, BABA Compliant


SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **ORIENTATION:** Indirect or direct
- **LUMEN MAINTENANCE:** L85 = >72,000 Hrs at 35°C ambient temperature
- **EFFICACY:** Up to 112 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Includes integral Class 2 power supplies
- **MAX AMBIENT OPERATING TEMP:** 35°C (95°F)



- **DIMMING:** 1% minimum dim level standard
- **CONTROLS:** 0-10V standard. Lutron Athena, Current NX, and nLight AIR optional. Contact factory for other controls (e.g., nLight Air, Current NX, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery Back-up, providing 90 minutes of emergency operation. Contact factory for other emergency options.
- **CONSTRUCTION:** Aluminum construction; precision injection molded optics
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

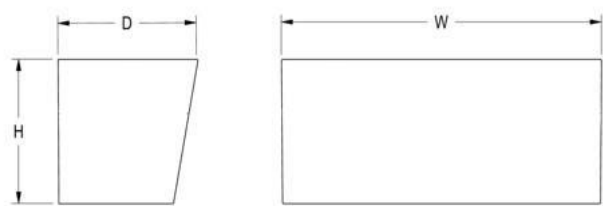

W	H	D
9 in	4 in	4 in
22.9 cm	10.2 cm	10.2 cm
Mounting Weight		
Approximate: 5 lb (3 kg)		

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/EEW12449. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Voltage	Lamp Options	CRI	Mounting	Emergency	Optical Distribution
EEW12449						
	A	B	C	D	E	F