

# IPS LED - Ceiling

EIC8393 30 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

---

The IPS series provides the advantages of LED technology in a fixture form appropriate for spaces traditionally lit by HID high-bays and low-bays. This luminaire provides an alternative to 250 watt Metal Halide fixtures. Features include instant-on, instant restrike, dimming, and a near 50 percent energy savings vs. traditional HID lamped fixtures. IPS is the ideal lighting solution for a variety of applications including athletic facilities, large retail spaces, multi-purpose facilities, and a wide range of industrial applications. For a complimentary lighting layout, contact our applications team at [SPIteam@spilighting.com](mailto:SPIteam@spilighting.com). Companion pendant fixtures also available.

## FEATURES & BENEFITS


- Optical chamber painted high reflectance (minimum 92%) white
- Spun metal housing adds high-quality, decorative element to fixture
- Handcrafted in USA

## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **LUMEN MAINTENANCE:** L70 life = 50,000+ hours
- **EFFICACY:** 109 lm/W delivered
- **CCT:** 3000K, 3500K, or 4000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class II power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- **LENS:** Clear Pattern 12 prismatic acrylic lens
- **FINISH:** Superwhite (PT01) thermoset polyester powder coat paint standard
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications



## DIMENSIONS

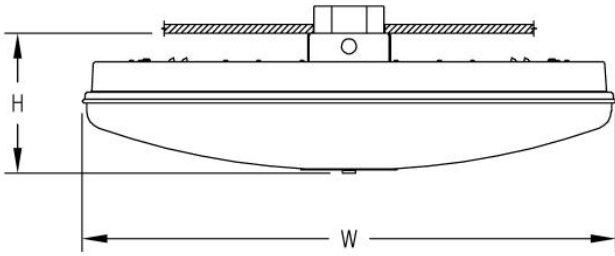

<b>W</b>	<b>H</b>
30 in	7.8 in
76.2 cm	19.8 cm

**Mounting Weight**  
Consult Factory.

## CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/EIC8393](http://www.spilighting.com/EIC8393). Not all options are available in all configurations; consult factory for details.

### Required Field \*

Catalog	Light Source:	Primary Finish:	Voltage:	Lamp Options:	Options:
	A		B	C	D

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

**L172W** | White 172W LED Light Engine | Delivered Lumens: 18,714

See last page for finish options

## B - VOLTAGE

**120-277V** | Universal Voltage

## C - LAMP OPTIONS

**3000K**<sup>1</sup> | 3000K CCT

**3500K**<sup>2</sup> | 3500K CCT

**4000K** | 4000K CCT

<sup>1</sup> Apply .95 multiplier for delivered lumens

<sup>2</sup> Apply .97 multiplier for delivered lumens

## D - OPTIONS

**WG** | Wire Guard

## Available Finishes

---

Not all finishes are available in all configurations; consult factory for details.

### Paint Colors

<b>PT01</b> Super White
----------------------------