

# INACTIVE SPEC SHEET

## IPS LED - Ceiling

EIC8393 30.00 in

**SPI**LIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

### DESCRIPTION

The IPS series provides the advantages of LED technology in a fixture form appropriate for spaces traditionally lit by HID high-bays and low-bays. This luminaire provides an alternative to 250 watt Metal Halide fixtures. Features include instant-on, instant restrike, dimming, and a near 50 percent energy savings vs. traditional HID lamped fixtures. IPS is the ideal lighting solution for a variety of applications including athletic facilities, large retail spaces, multi-purpose facilities, and a wide range of industrial applications. For a complimentary lighting layout, contact our applications team at [SPIteam@spilighting.com](mailto:SPIteam@spilighting.com). Companion pendant fixtures also available.

### FEATURES & BENEFITS

- Optical chamber painted high reflectance (minimum 92%) white
- Spun metal housing adds high-quality, decorative element to fixture
- Handcrafted in USA


### SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ (contact factory for 90+)
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** 109 lm/W delivered
- **CCT:** 3000K, 3500K, or 4000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **LENS:** Clear Pattern 12 prismatic acrylic lens
- **FINISH:** Superwhite (PT01) thermoset polyester powder coat paint standard



- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

## DIMENSIONS

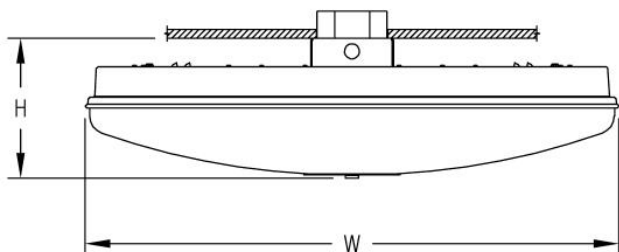

<b>W</b>	<b>H</b>
30 in	7.8 in
76.2 cm	19.8 cm

**Mounting Weight**  
Consult Factory.

## CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/EIC8393](http://www.spilighting.com/EIC8393). Not all options are available in all configurations; consult factory for details.

### Required Field \*

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI	Emergency	Options
EIC8393							
	A		B	C	D	E	F

### A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

☐ **L172W** | White 172W LED Light Engine

See last page for finish options

### B - VOLTAGE \*

☐ 120-277V | Universal Voltage

### C - LAMP OPTIONS \*

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

D - CRI

---

- ☐ DF\_80 | (default)
- ☐ 90

E - EMERGENCY

---

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ EMR | Emergency Battery Remote

F - OPTIONS

---

- ☐ WG | Wire Guard

## Standard Finishes

---

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

PT01

RAL9003 Signal White (Gloss)

### Metallic Paint Colors

PT22

Platinum (Metallic Gloss)

PT48

Brass (Metallic Textured)

PT28

Dark Stainless (Metallic Gloss)

PT49

Bronze (Metallic Textured)

PT32

Dark Bronze (Metallic Gloss)

PT46

Aluminum (Metallic Textured)

## Specialty Finishes

---



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.