

IPS LED - Pendant

EIP10958 22 in

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

An effective alternative to traditional HID high- and low-bay lighting, IPS offers all the advantages of LED lighting. Replacing traditional HID sources with LED lumen packages provides a near 50 percent energy-savings per fixture. Moreover, the IPS family can be dimmed to 10 percent of full light output. Features of this fixture include an impact resistant acrylic lens, low-profile housing, and recyclable steel construction. Available in 22" or 30" diameters in stem, aircraft cable, or chain mounts. For a complimentary lighting layout, contact our applications team at SPIteam@spilighting.com. Companion ceiling fixture also available.

FEATURES & BENEFITS


- Optical chamber painted high reflectance (minimum 92%) white
- Spun metal housing adds high-quality, decorative element to fixture
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **LUMEN MAINTENANCE:** L70 life = 50,000+ hours
- **EFFICACY:** 109 lm/W delivered
- **CCT:** 3000K, 3500K, or 4000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class II power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- **LENS:** Clear Pattern 12 prismatic acrylic lens
- **FINISH:** Superwhite (PT01) thermoset polyester powder coat paint standard
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications



DIMENSIONS

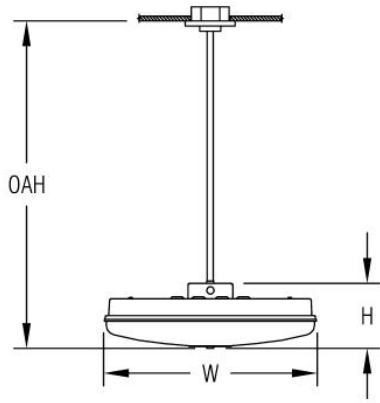

W	H	OAH
22 in	6.6 in	36 in
55.9 cm	16.8 cm	91.4 cm

Mounting Weight
Approximate: 50 lb (23 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/EIP10958. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source:	Primary Finish:	Voltage:	Lamp Options:	Mounting:	Options:	Other Than Standard Options:
	A		B	C	D	E	F

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

L86W | White 86W LED Light Engine | Delivered Lumens: 9,357

[See last page for finish options](#)

B - VOLTAGE

120-277V | Universal Voltage

C - LAMP OPTIONS

3000K¹ | 3000K CCT

3500K² | 3500K CCT


4000K | 4000K CCT

¹ Apply .95 multiplier for delivered lumens

² Apply .97 multiplier for delivered lumens

D - MOUNTING

- DF_STM** | Stem Mount (default)
- AC** | Aircraft Cable & Power Cord Mount
- CN** | Chain Mount

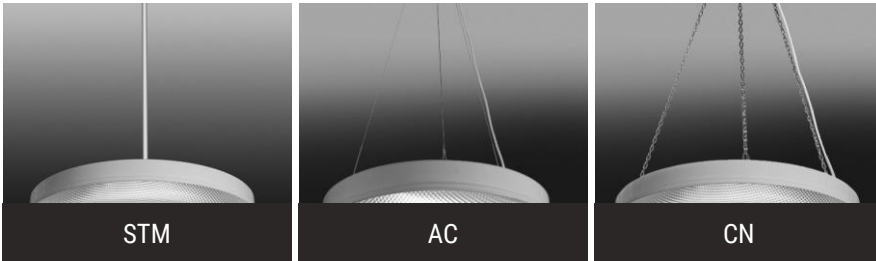

E - OPTIONS

- BPC** | Black Power Cord
- WG** | Wire Guard

F - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard

Available Finishes

Not all finishes are available in all configurations; consult factory for details.

Paint Colors

PT01 Super White
