

# INACTIVE SPEC SHEET

## Marker - Wall

EIW11838 4.50 in

**SPI**LIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

### DESCRIPTION


Enjoy maximum flexibility in designing your space with the Marker. This collection offers ceiling mounts and wall sconces, both available in a round or square shape. Illumination patterns can be specifically tailored to your space by choosing one of several options available. Utilizing a low-energy consumption LED light source, the Marker is a highly efficient and cost saving option. Choose from a palette of both painted and metal finishes.

### FEATURES & BENEFITS


- Optically engineered, precision LED optics control light distribution and direct light where it is needed
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA

### SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard on LED light engines
- **CONSTRUCTION:** Aluminum construction provides durable protection for internal components and is recyclable
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US and Canada) for use in damp locations; not recommended for exterior applications

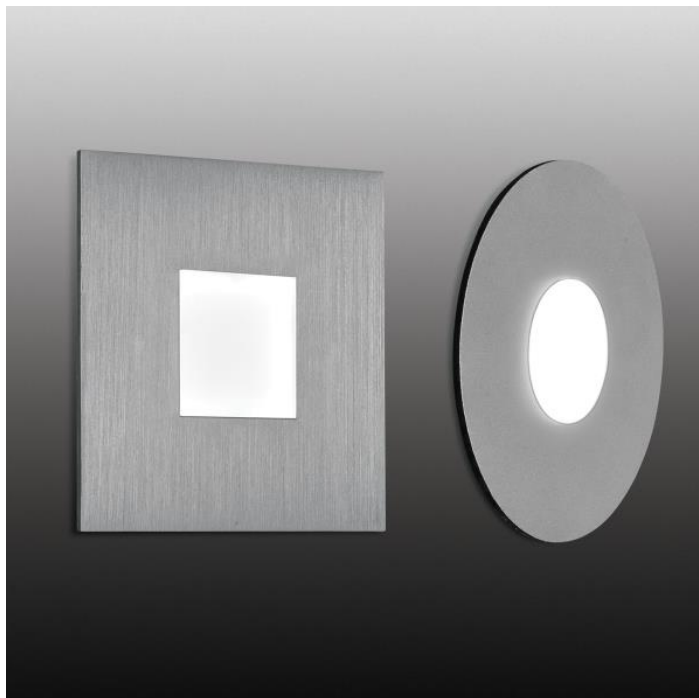

DIMENSIONS

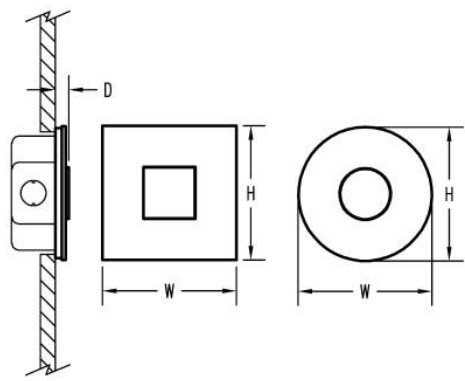

| W  | H       | D      |
|--|---------|--------|
| 4.5 in                                     | 4.5 in  | 0.5 in |
| 11.4 cm                                    | 11.4 cm | 1.3 cm |
| <b>Mounting Weight</b><br>Consult Factory. |         |        |

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/EIW11838](http://www.spilighting.com/EIW11838). Not all options are available in all configurations; consult factory for details.

Required Field \*

|          |               |                 |         |               |                |         |
|----------|---------------|-----------------|---------|---------------|----------------|---------|
| Catalog  | Light Source* | Primary Finish* | Voltage | Color Accents | Motif Accents* | Options |
| EIW11838 |               |                 |         |               |                |         |
|          | A             |                 | B       | C             | D              | E       |

A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

☐ **L4W** | White 4W LED Light Engine 3000K

See last page for finish options


B - VOLTAGE

☐ **120-277V** | Universal Voltage

C - COLOR ACCENTS

Standard diffuser is frosted acrylic. To add a color gel, please choose one of the following:

- ☐ **CG01** | Red Color Gel
- ☐ **CG02** | Orange Color Gel
- ☐ **CG03** | Green Color Gel
- ☐ **CG04** | Blue Color Gel

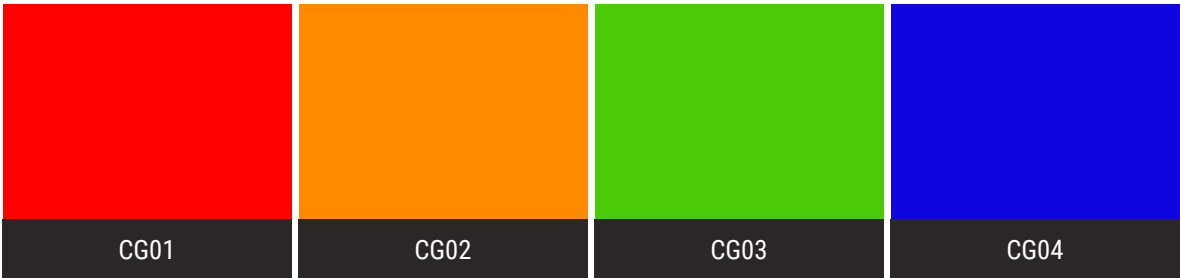

D - MOTIF ACCENTS \*

- ☐ FP01 | Square Recessed Lens
- ☐ FP02 | Square Proud Lens
- ☐ FP03 | Round Recessed Lens
- ☐ FP04 | Round Proud Lens

E - OPTIONS

- ☐ FPL | Face Plate
- ☐ LVR | Louver
- ☐ EDG | Edge Lit



## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

|   |                                       |                                 |   |                                 |
|---|---------------------------------------|---------------------------------|---|---------------------------------|
| <b>PT01</b><br>RAL9003 Signal White (Gloss) | <b>PT51</b><br>Matte White (Textured) | <b>PT02</b><br>White (Textured) | <b>PT04</b><br>RAL9001 Cream (Textured) | <b>PT11</b><br>Black (Textured) |
|---|---------------------------------------|---------------------------------|---|---------------------------------|

### Brushed Stainless

|                                       |
|---------------------------------------|
| <b>BSS</b><br>Brushed Stainless Steel |
|---------------------------------------|

### Metallic Paint Colors

|   |  |  |   |   |
|---|--|--|---|---|
| <b>PT22</b><br>Platinum (Metallic Gloss)    | <b>PT48</b><br>Brass (Metallic Textured) | <b>PT28</b><br>Dark Stainless (Metallic Gloss) | <b>PT49</b><br>Bronze (Metallic Textured) | <b>PT32</b><br>Dark Bronze (Metallic Gloss) |
| <b>PT46</b><br>Aluminum (Metallic Textured) |  |  |   |   |

### Brushed Aluminum

|                                |
|--------------------------------|
| <b>BAL</b><br>Brushed Aluminum |
|--------------------------------|

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.