

INACTIVE SPEC SHEET

Echo Round 9.0 LED - Wall

EIW12152 38.20 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Echo Round 9.0 LED is designed to address large, high-ceiling spaces such as atriums, gymnasiums, natatoriums, recreation pools, libraries, and open offices. It delivers premium indirect lighting with a smooth, uniform, forward throw output. Echo Round 9.0 LED is designed with a solid aluminum housing, encompassing the latest technology in a traditional shape to seamlessly integrate into the space. For a complimentary lighting layout, contact our applications team at SPIteam@spilighting.com.

FEATURES & BENEFITS

- Standard top lens corrects color-over-angle discoloration, delivering a clean white beam suitable for highly-finished ceilings and walls
- IP68 light engines, connectors, and fully potted drivers stand up to harsh natatorium environments
- Yoke mountings feature formed aluminum yoke brackets which equip the fixture with durable mounting components that will not rust or corrode
- All visible fasteners are flush mounted, providing a clean design
- Field adjustable housing locks into position, enabling precise fixture alignment for high-quality design performance
- Handcrafted in USA

SPECIFICATIONS


- **LIGHT SOURCE:** White LED light engine
- **ORIENTATION:** For indirect use only
- **CRI:** 80+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** Up to 99 lm/W delivered
- **MAX AMBIENT OPERATING TEMP:** 28°C (82°F)
- **CCT:** 3500K or 4000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Fully potted integral Class 1 power supply standard
- **DIMMING:** 0-10V controls standard on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper,



WaveLinx, or Casambi).

- **CONSTRUCTION:** Extruded aluminum construction provides durable protection for internal components and is recyclable; cast aluminum end caps protect internal components and are recyclable
- **FINISH:** Housing and mounting components finished to match. To specify separately, contact factory. Choose from 26 standard thermoset polyester powder coat paint colors. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US and Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

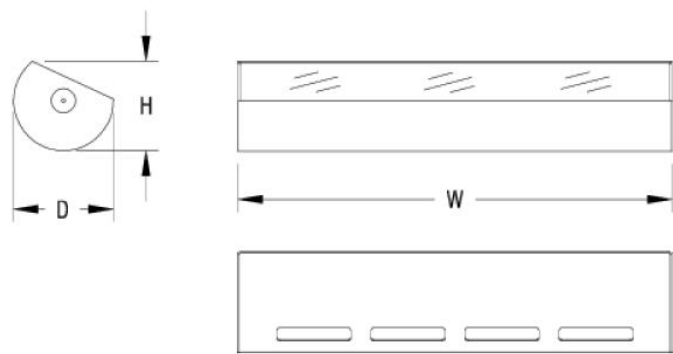

W	H	D
38.2 in 97 cm	7.8 in 19.8 cm	8.9 in 22.6 cm
Mounting Weight Approximate: 40 lb (19 kg)		

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/EIW12152. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	Mounting*	Accessories	Options
EIW12152							
	A		B	C	D	E	F

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

☐ **L380W** | White 380W LED Light Engine

See last page for finish options

B - VOLTAGE *

☐ 120-277V | Universal Voltage

C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.


- ☐ 3500K ¹ | 3500K CCT
- ☐ 4000K | 4000K CCT

¹ Apply .91 multiplier for delivered lumens

D - MOUNTING *

Hub and Horizontal mounts use a hub canopy at each end to mount over a standard 4" octagonal junction box; auxiliary mounting holes are provided. Yoke mount features a mounting bracket at each end of the fixture. The 4" octagonal j-box is covered by the mounting and a cover plate. INSTALLATION NOTES: During installation the contractor is responsible to use actual fixtures to ensure accurate mounting centers from one fixture to the next along the length of the linear run. Choose a mounting from below:

- ☐ HUB | Hub Mount
- ☐ HZT | Horizontal Mount
- ☐ YOK | Yoke Mount



D	H1	H2	H1	H2	MC	D	H1	H2
9.4 in	6.5 in	7.8 in	6.0 in	7.8 in	40.5 in	10.1 in	4.2 in	7.8 in
23.9 cm	16.5 cm	19.8 cm	15.2 cm	19.8 cm	102.9 cm	25.7 cm	10.7 cm	19.8 cm
MC	W		OAP	W		MC	W	
40.5 in	47 in		22.5 in	45.5 in		30.6 in	38.9 in	
102.9 cm	119.4 cm		57.2 cm	115.6 cm		77.7 cm	98.8 cm	

HUB

HZT

YOK

E - ACCESSORIES

Cut-Off Shield painted to match housing.

☐ CS | Cut-Off Shield



F - OPTIONS

☐ F | Fusing

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT11 Black (Textured)
---------------------------------------------	---------------------------------------	---------------------------------	-----------------------------------------	---------------------------------

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.