

Echo Blade Micro Max

EIW12398 9.13 in

JOB NAME:
TYPE:
NOTES:

DESCRIPTION

Our Smallest, most powerful, and most versatile asymmetric lighting tool. Designed to be a discreet powerhouse, this fixture delivers up to 5,000 lumens, has 6 optical distributions, and can be utilized in both indirect and direct applications.

FEATURES & BENEFITS

- 4" x 9"x 4"
- ADA compliant
- Up to 5,000 delivered lumens
- 6 optical distributions
- Indirect and direct applications
- A true asymmetric with high-efficiency optics
- Efficacy up to 112 lm/W
- Optional backlight shield available
- Full horizontal cutoff
- Top lens removes striations and corrects for color-over-angle
- Handcrafted in USA, BABA Compliant


SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **ORIENTATION:** Indirect or direct
- **LUMEN MAINTENANCE:** L85 = >72,000 Hrs at 35°C ambient temperature
- **EFFICACY:** Up to 112 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Includes integral Class 2 power supplies
- **MAX AMBIENT OPERATING TEMP:** 35°C (95°F)
- **DIMMING:** 1% minimum dim level standard
- **CONTROLS:** 0-10V standard. Lutron Athena, Current NX, and nLight AIR optional. Contact factory for other controls (e.g., nLight Air, Current NX, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)



- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery Back-up, providing 90 minutes of emergency operation. Contact factory for other emergency options.
- **CONSTRUCTION:** Aluminum construction; precision injection molded optics
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

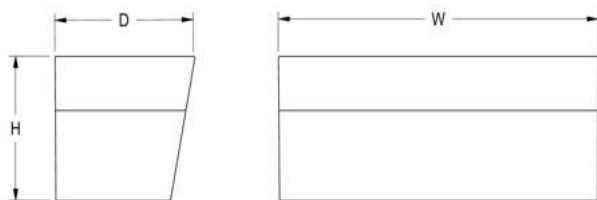

W	H	D
9.1 in	4 in	4 in
23.2 cm	10.2 cm	10.2 cm

Mounting Weight
Approximate: 5 lb (3 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/EIW12398. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Controls*	Mounting	Emergency	Optical Distribution
EIW12398									
	A		B	C	D	E	F	G	H

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Delivered lumens shown are with the Deep Asymmetric (DA) optical package; apply multiplier for alternate distributions.

☐ **L22W** | White 22W LED Light Engine | Delivered Lumens: 2,466

☐ **L44W** | White 44W LED Light Engine | Delivered Lumens: 4,932

See last page for finish options

B - VOLTAGE *

☐ 120-277V | Universal Voltage

C - LAMP OPTIONS *

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

	80 CRI	90 CRI
2700K	n/a	0.67
3000K	0.93	0.74
3500K	0.93	0.74
4000K	1.00	0.74
5000K	1.00	n/a

D - CRI *

- ☐ DF_80 ¹ | (default)
- ☐ 90 ²

¹ Not Available in 2700K

² Not Available in 5000K

E - CONTROLS *

Extended lead times may apply for controls other than 0-10V. Contact factory for additional control options such as nLight Air, Current NX, Enlighted, Encelium, Wattstopper, WaveLinx, Casambi, or others.


- ☐ DF_DIM1 | 0-10V Control, 1% Dimming (default)
- ☐ AWRN | Lutron Athena Wireless Node, 1% Dimming

F - MOUNTING

Yoke Mount features ±15° of adjustable tilt.

- ☐ SSB | Surface Mount Over Switch Box
- ☐ YOK ³ | Yoke Mount With Standard J-Box Cover

³ Not ADA Compliant with yok mount

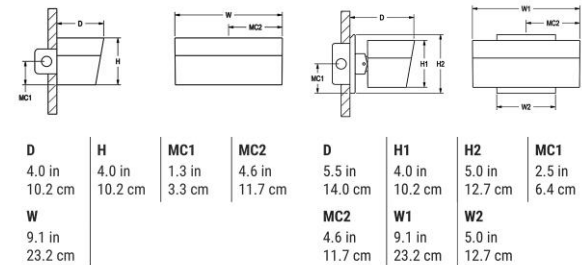

SSB	YOK
-----	-----

G - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for battery back-up.

☐ **EMR** | Emergency Battery Remote

H - OPTICAL DISTRIBUTION

- Deep Asymmetric: Larger spaces, gets more light to center of room.
- Wide Asymmetric: Ceiling uniformity, wall wash, closer to ceiling applications.
- Ultra-Wide Asymmetric: Narrow spaces, maximize fixture spacing.

- ☐ **DA** | Deep Asymmetric
- ☐ **DAB** ⁴ | Deep Asymmetric with Backlight Shield
- ☐ **WA** ⁵ | Wide Asymmetric
- ☐ **WAB** ⁶ | Wide Asymmetric with Backlight Shield
- ☐ **UWA** ⁷ | Ultra Wide Asymmetric
- ☐ **UWAB** ⁸ | Ultra Wide Asymmetric With Backlight Shield


⁴ Delivered lumens are 76% of the output shown under Light Source; see IES file

⁵ Delivered lumens are 97% of the output shown under Light Source; see IES file


⁶ Delivered lumens are 65% of the output shown under Light Source; see IES file

⁷ Delivered lumens are 95% of the output shown under Light Source; see IES file


⁸ Delivered lumens are 73% of the output shown under Light Source; see IES file




DA




DAB




WA



WAB



UWA



UWAB

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT67 RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57 RAL1015 Light Ivory (Textured)	PT58 RAL8004 Copper Brown (Textured)	PT59 RAL6021 Pale Green (Textured)	PT60 RAL1019 Grey Beige (Textured)	PT61 RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Brushed Aluminum

BAL Brushed Aluminum	MAL Microbrushed Aluminum
--------------------------------	-------------------------------------

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.