

MOSR Tryg Linear LED

Surface Mount/Suspended

Remote Power Supply

JOB NAME _____


TYPE _____



Tryg Linear LED


Tryg, a low-profile LED fixture offers a unique design and durability suitable for any project. LEDs enable this luminaire to feature a low-profile housing, while its creative design acts as an efficient heat sink, maximizing output and life by allowing the LEDs to operate at an optimal temperature.

Optical Distribution




Run Sections and Suspensions

FBK Fixed Bracket Mount

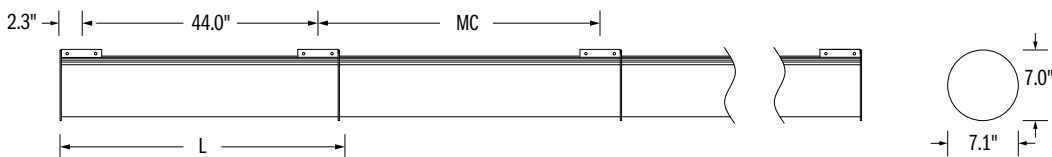

BUL Ceiling Coupler and Aircraft Cable

Also available with Canopy and Aircraft Cable (CAA) and Canopy and Stem (CAS)

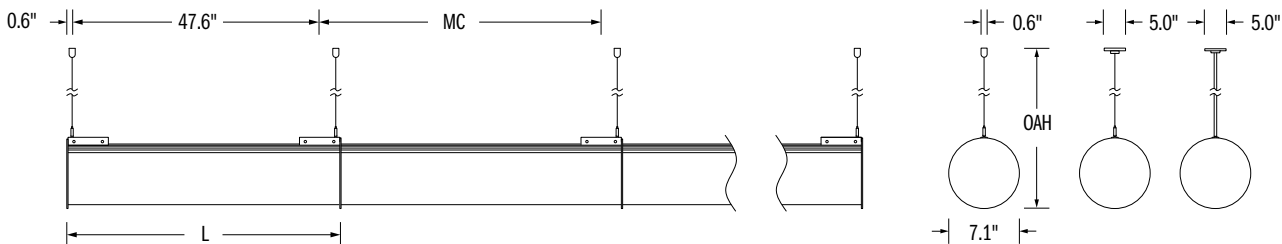

Dimensions

MODULE	MOUNTING CENTER	LENGTH
048	48.0"	48.3"

Specifications


- Extruded aluminum construction provides durable protection for internal components and is recyclable.
- Available in anodized finishes with some parts painted to match. Anodized finish provides optimal thermal effectiveness and durable corrosion protection.
- Stem mount versions include (2) 5/8" aluminum stem(s) painted to match anodized finish.
- Each module requires connection to a 24V constant voltage power supply. Modules over 60W may require multiple power supplies/feeds.
- RGB & color options available - contact factory for details.

- SPI Lighting uses strict guidelines in LED selection to ensure the white LEDs we use meet or exceed ANSI Binning Standards (ANSI C78.377).
- Frosted acrylic shield enhances a space with diffused illumination.
- Black power cord standard unless otherwise specified.
- 0-10V dimming standard on PS options
- RELATED LINKS:**
[LED Power Supplies \(24V DC\)](#)
["Designed to be LED"](#)

Technical Notes

- INSTALLATION NOTES:** During installation the contractor is responsible to use actual fixtures to ensure accurate mounting centers from one fixture to the next along the length of the linear run.
- ETL listed to UL standards (US and Canada) for damp location. Not recommended for wet locations.
- L70 life => 50,000+ hours.
- Remote Class II Power Supply required with LED lamping.
- Max distance to the driver is 15' (includes OAH). For extended distances, contact factory.



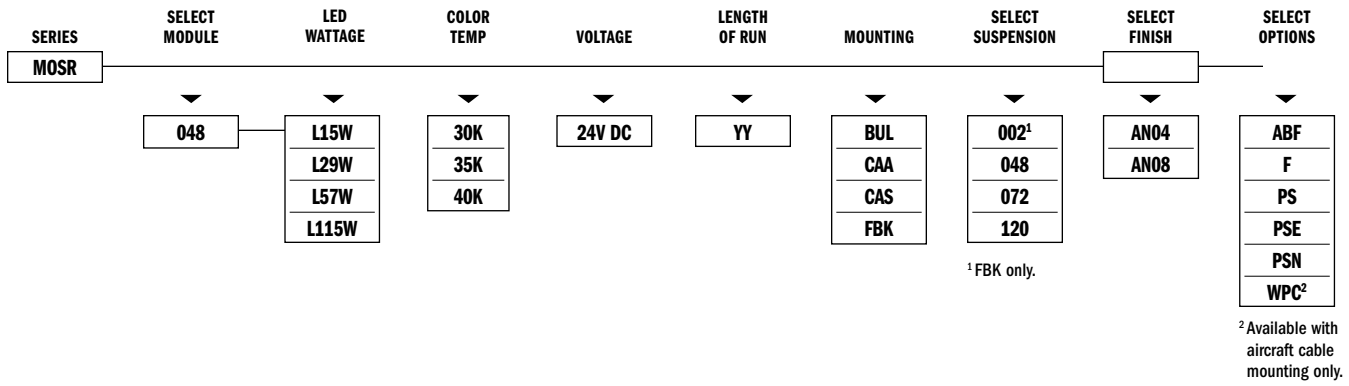


Delivered Lumens

048			
L15W	L29W	L57W	L115W
1364	2636	5181	10454

Delivered lumens are shown at 4000 CCT; apply multiplier for delivered lumens at other CCT.

CCT	Proration Factor
4000K	1.0
3500K	0.97
3000K	0.95

Mountings and Options

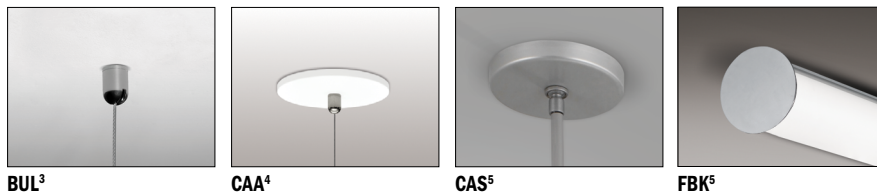

³ Nickel plated.
 ⁴ Painted white.
 ⁵ Painted to match fixture.

Code Definitions

MOUNTING	SUSPENSION	FINISHES <i>(See Color Chart for Details)</i>	OPTIONS
BUL .6" Ceiling Coupler	002 2" (FBK Only)	AN04 Anodized Aluminum (Clear)	ABF Alternate Bulkhead Finish
CAA 5" Canopy and Aircraft Cable	048 48"	AN08 Black Anodized	F Fusing
CAS 5" Canopy and Stem	072 72"		PS Remote Power Supply
FBK Fixed Bracket	120 120"		PSE Power Supply Enclosure
			PSN No Power Supply
			WPC White Power Cord