


SLCT Tryg Linear LED

Surface Mount/Suspended

Remote Power Supply

JOB NAME _____


TYPE _____

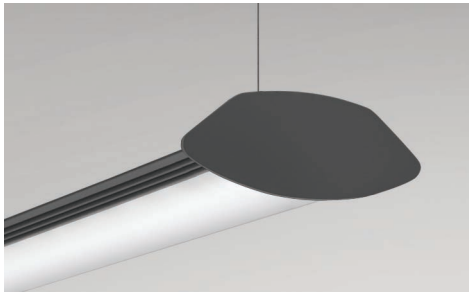

Tryg Linear LED


Tryg, a low-profile LED fixture offers a unique design and durability suitable for any project. LEDs enable this luminaire to feature a low-profile housing, while its creative design acts as an efficient heat sink, maximizing output and life by allowing the LEDs to operate at an optimal temperature.

Optical Distribution




Run Section


FBK Fixed Bracket Mount

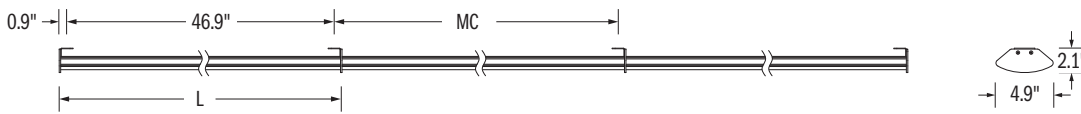

BUL Ceiling Coupler and Aircraft Cable

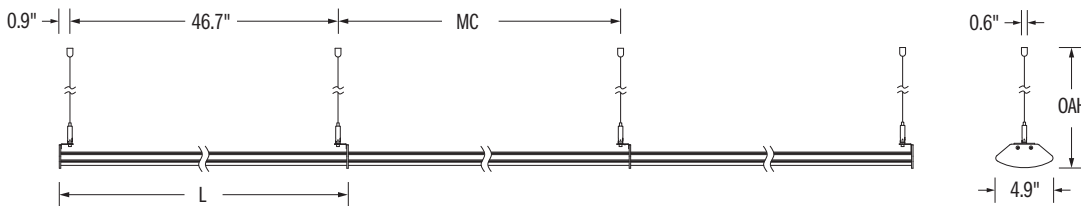

CAS Canopy and Stem and Canopy and Aircraft Cable (CAA)

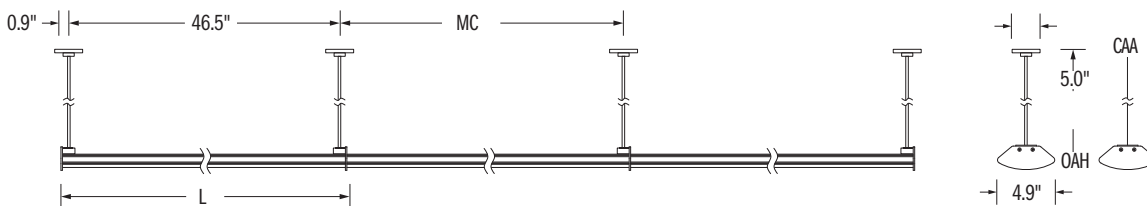

Dimensions

| MODULE | MOUNTING CENTER | LENGTH BUL/FBK | LENGTH CAA/CAS |
|--------|-----------------|-------------------|-------------------|
| 048 | 48.0" | 48.6" | 51.5" |


Specifications

- Extruded aluminum construction provides durable protection for internal components and is recyclable.
- Available in anodized finishes with some parts painted to match. Anodized finish provides optimal thermal effectiveness and durable corrosion protection.
- Stem mount versions include (2) 5/8" aluminum stem(s) painted to match anodized finish.
- Each module requires connection to a 24V constant voltage power supply. Modules over 60W may require multiple power supplies/feeds.
- SPI Lighting uses strict guidelines in LED selection to ensure the white LEDs we use meet or exceed ANSI Binning Standards (ANSI C78.377).
- Frosted acrylic shield enhances a space with diffused illumination.
- Black power cord standard unless otherwise specified.
- 0-10V dimming standard on remote PS option.
- **RELATED LINKS:**
[LED Power Supplies \(24V DC\)](#)
["Designed to be LED"](#)

Technical Notes

- **INSTALLATION NOTES:** During installation the contractor is responsible to use actual fixtures to ensure accurate mounting centers from one fixture to the next along the length of the linear run.
- ETL listed to UL standards (US and Canada) for damp location. Not recommended for wet locations.
- L70 life => 50,000+ hours.
- Remote Class II Power Supply required with LED lamping.
- Max distance to the driver is 15' (includes OAH). For extended distances, contact factory.



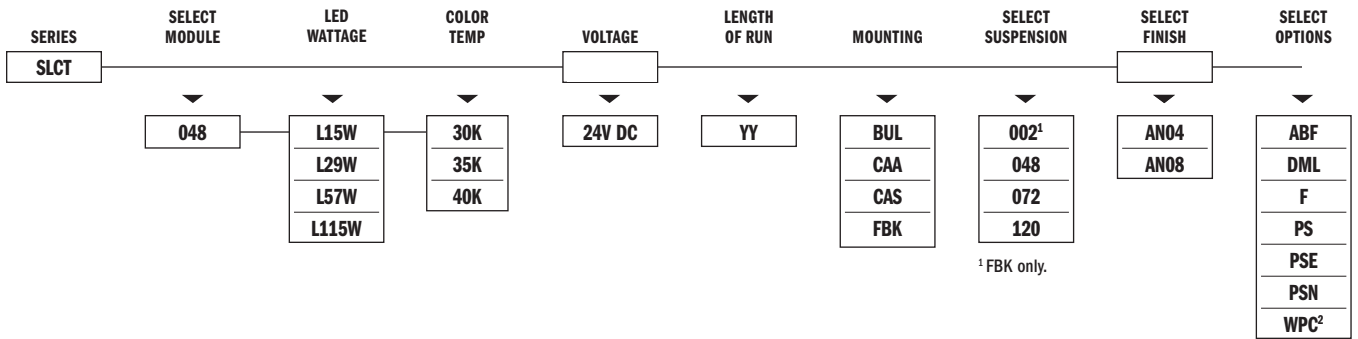

¹ FBK only.

² Available with aircraft cable mounting only.


Delivered Lumens

| 048 | | | |
|------|------|------|-------|
| L15W | L29W | L57W | L115W |
| 1232 | 2381 | 4680 | 9442 |

Delivered lumens are shown at 4000 CCT; apply multiplier for delivered lumens at other CCT.

| CCT | Proration Factor |
|-------|------------------|
| 4000K | 1.0 |
| 3500K | 0.97 |
| 3000K | 0.95 |

Mountings and Options

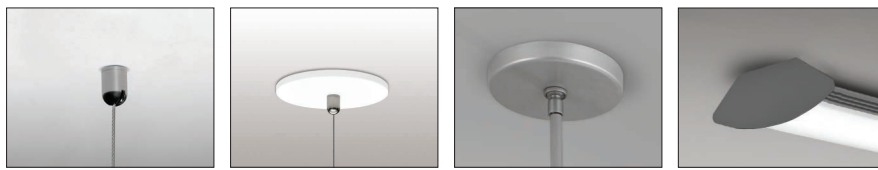

BUL³ CAA⁴ CAS⁵ FBK⁵

- ³ Nickel plated.
- ⁴ Painted white.
- ⁵ Painted to match fixture.

Code Definitions

| MOUNTING | SUSPENSION | FINISHES <i>(See Color Chart for Details)</i> | OPTIONS |
|---|--------------------------|---|--|
| BUL .6" Ceiling Coupler | 002 2" (FBK Only) | AN04 Anodized Aluminum (Clear) | ABF Alternate Bulkhead Finish |
| CAA 5" Canopy and Aircraft Cable | 048 48" | AN08 Black Anodized | DML 0-10V Dimming |
| CAS 5" Canopy and Stem | 072 72" | | F Fusing |
| FBK Fixed Bracket | 120 120" | | PS Remote Power Supply, 0-10v Dimming |
| | | | PSE Power Supply Enclosure |
| | | | PSN No Power Supply |
| | | | WPC White Power Cord |
| | | | |
| | | | |
| | | | |
| | | | |