


SLWT Tryg Linear LED Wall

Remote Power Supply

JOB NAME


TYPE

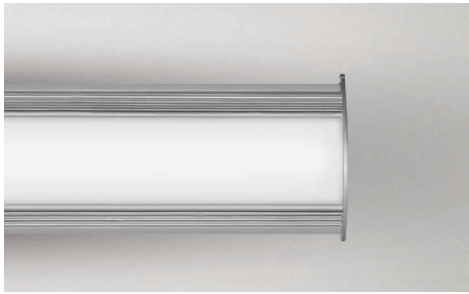

Tryg Linear LED


Tryg, a low-profile LED fixture offers a unique design and durability suitable for any project. LEDs enable this luminaire to feature a low-profile housing, while its creative design acts as an efficient heat sink, maximizing output and life by allowing the LEDs to operate at an optimal temperature.

Optical Distribution

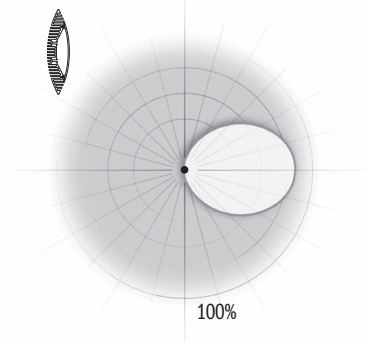

Run Section

FBK Fixed Bracket Mount

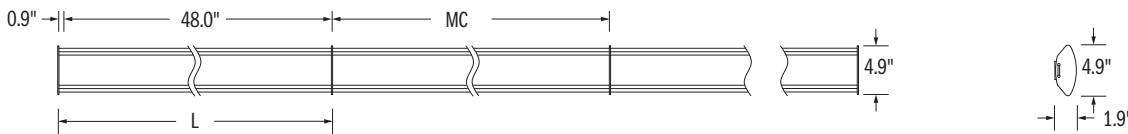

Dimensions

MODULE	MOUNTING CENTER	LENGTH
048	48.0"	48.6"
096	96.0"	96.6"

Specifications

- Extruded aluminum construction provides durable protection for internal components and is recyclable.
- Available in anodized finishes with some parts painted to match. Anodized finish provides optimal thermal effectiveness and durable corrosion protection.
- Stem mount versions include (2) 5/8" aluminum stem(s) painted to match anodized finish.
- Each module requires connection to a 24V constant voltage power supply. Modules over 60W may require multiple power supplies/feeds.

- SPI Lighting uses strict guidelines in LED selection to ensure the white LEDs we use meet or exceed ANSI Binning Standards (ANSI C78.377).
- Frosted acrylic shield enhances a space with diffused illumination.
- Black power cord standard unless otherwise specified.
- 0-10V dimming standard on remote PS option.


RELATED LINKS:

[LED Power Supplies \(24V DC\)](#)
["Designed to be LED"](#)

Technical Notes

- **INSTALLATION NOTES:** During installation the contractor is responsible to use actual fixtures to ensure accurate mounting centers from one fixture to the next along the length of the linear run.
- ETL listed to UL standards (US and Canada) for damp location. Not recommended for wet locations.
- L70 life => 50,000+ hours.
- Remote Class II Power Supply required with LED lamping.
- Max distance to the driver is 15' (includes OAH). For extended distances, contact factory.



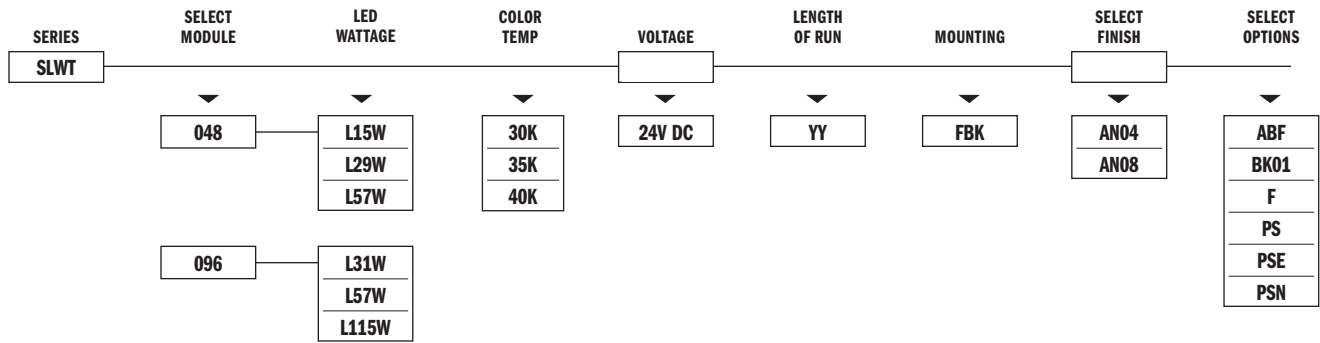


Delivered Lumens

048			096		
L15W	L29W	L57W	L31W	L57W	L115W
1232	2381	4680	2545	4680	9442

Delivered lumens are shown at 4000 CCT; apply multiplier for delivered lumens at other CCT.

CCT	Proration Factor
4000K	1.0
3500K	0.97
3000K	0.95

Mountings and Options

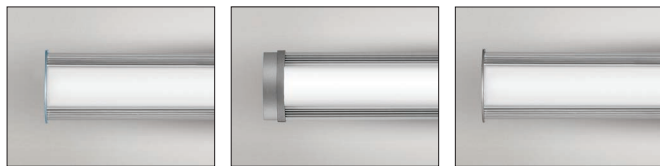

¹ Painted to match fixture.

ABF (Shown with PT42)

BK01

FBK¹

Code Definitions

MOUNTING

FBK Fixed Bracket

FINISHES (See Color Chart for Details)

AN04 Anodized Aluminum (Clear)

AN08 Black Anodized

OPTIONS

ABF Alternate Bulkhead Finish

BK01 Bulkhead with 1" Accent Tubes

DML 0-10V Dimming

F Fusing

PS Remote Power Supply

PSE Power Supply Enclosure

PSN No Power Supply