

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## ECHO VELOCITY STEM MOUNT WET LOCATION

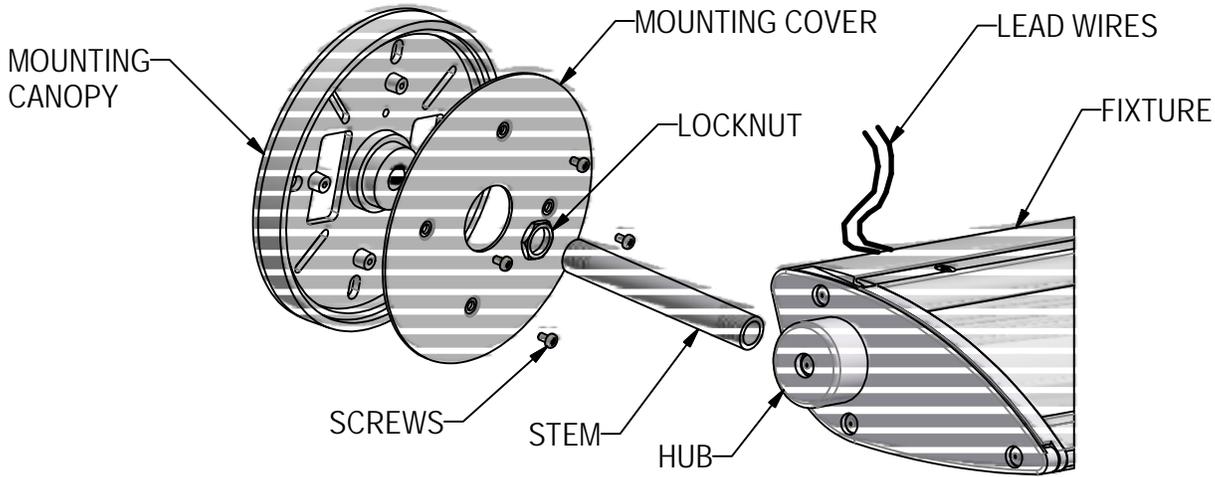

T5 LAMP		T8 LAMP / LED	
SIZE	"A" MTG	SIZE	"A" MTG
2 FT	25"	1 FT	14 3/8"
3 FT	37 1/8"	2 FT	26 3/8"
4 FT	48 5/8"	3 FT	38 3/8"
5 FT	60 1/2"	4 FT	50 3/8"
6 FT	72 3/4"	5 FT	62 3/8"
8 FT	96 3/8"	6 FT	76"
10 FT	120 1/8"	8 FT	100"
		10 FT	124"

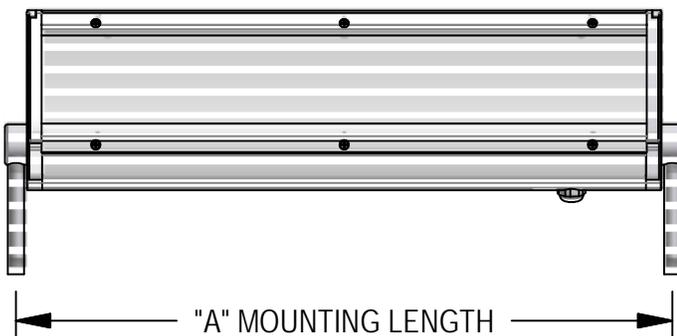

1. SCREW STEM INTO HUB. SCREW LOCKNUT ONTO OPPOSITE END OF STEM. SLIDE COVER OVER STEM, AND SCREW CAST MOUNTING PLATE ONTO THE STEM. (NOTE ORIENTATION OF CAST MOUNTING PLATE) TIGHTEN LOCKNUT AGAINST CAST MOUNTING PLATE.

2. MOUNT CAST MOUNTING PLATE W/SCREWS. (BY OTHERS)

3. SECURE COVER TO CAST MOUNTING PLATE WITH SCREWS PROVIDED.

4. LEAD WIRES TO BE ROUTED TO A WET LISTED J-BOX (BY OTHERS). MAKE CONNECTIONS PER CODE IN J-BOX. INSTALL J-BOX PER MFG IINSTRUCTIONS.

12/20/13  
(REV1)  
IS58618X