

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

LORIS MULTI-STEM PENDANT

NOTES:

1. ATTACH MOUNTING PLATE ASSEMBLY TO J-BOX (BY OTHERS) AND SECURE WITH HARDWARE (BY OTHERS) USING AUXILIARY HOLES PROVIDED. NOTE: FIXTURE MUST BE SUPPORTED WITH STRUCTURAL MEMBERS (BY OTHERS) IN ADDITION TO J-BOX.
2. RAISE FIXTURE AND ATTACH MOUNTING BRACKET TO MOUNTING PLATE ASSEMBLY USING (8) KEPS NUTS PROVIDED.
3. MAKE NECESSARY CONNECTIONS.
4. RAISE CANOPY SPINNING AND SECURE TO HANGSTRAIGHTS WITH (4) KNURL NUTS PROVIDED.
5. TO RELAMP, REMOVE (2) THUMB NUTS. RAISE FIXTURE HOUSING ASSEMBLY, TWIST AND LOWER CAREFULLY. ALLOW FIXTURE HOUSING ASSEMBLY TO HANG ON SAFETY CABLES PROVIDED.

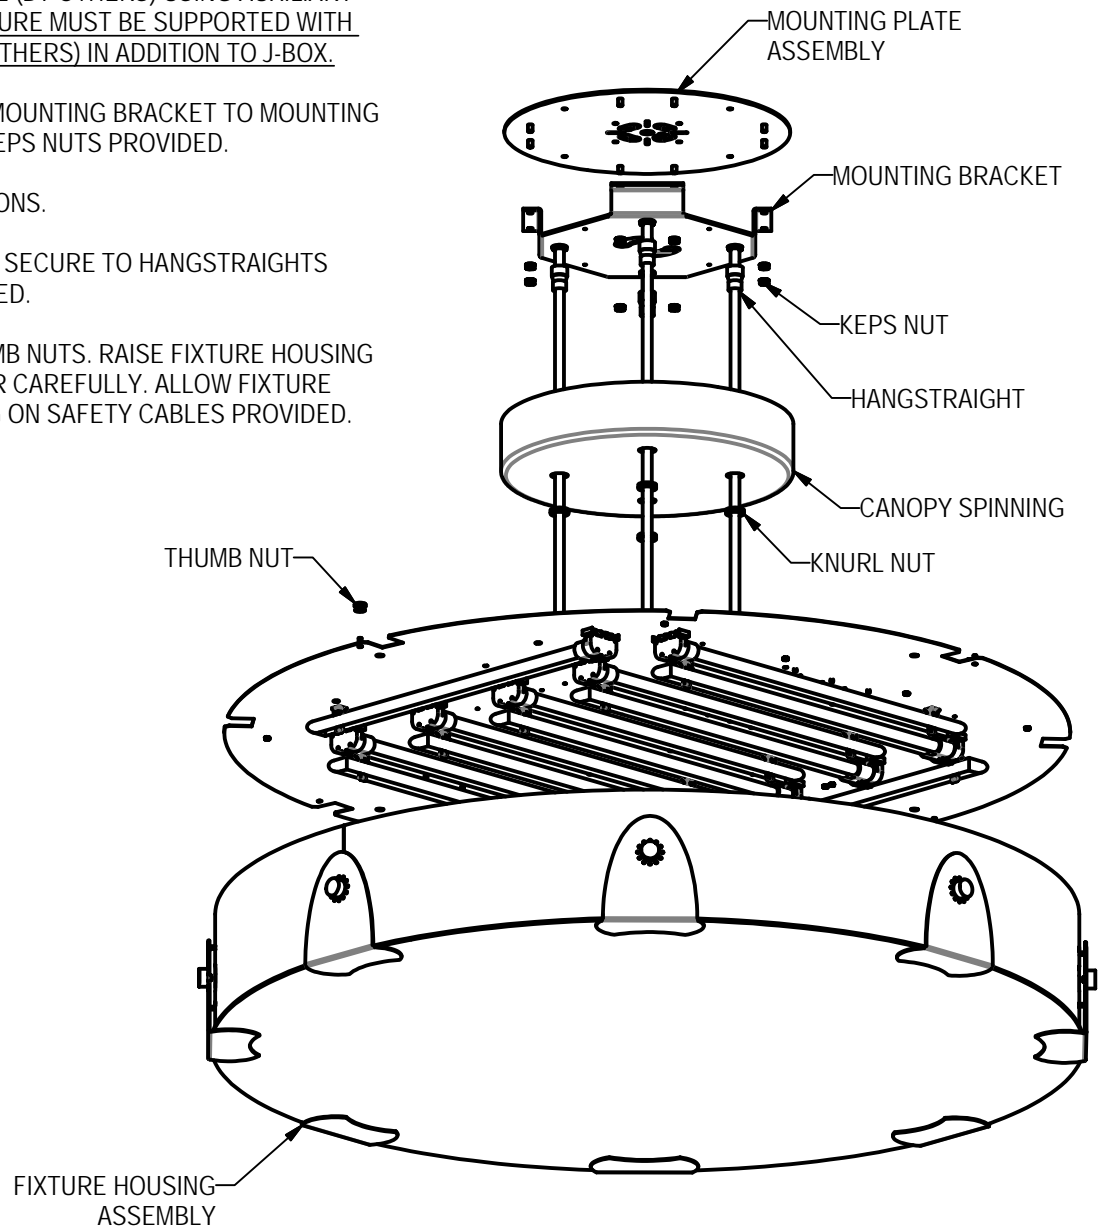

11/25/13
IS70524X