

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.


## LED LIGHTRUSS

PAGE 1 OF 2

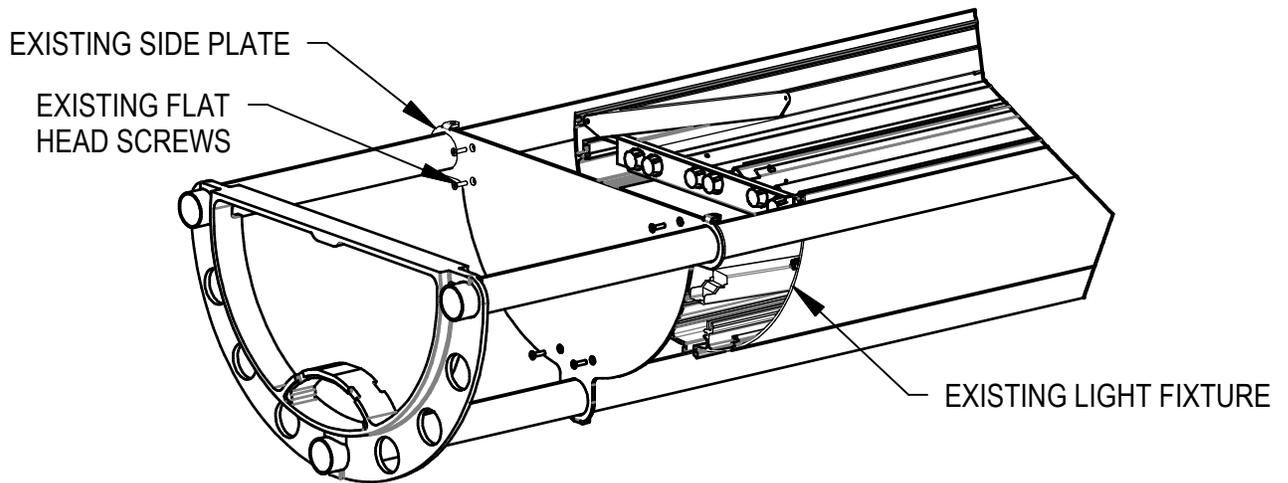

### Steps for removing an existing fixture:

1. Make sure power is off. Disconnect the power leads from inside the fixture.
2. Remove all mechanical and electrical components from inside the existing fixture.
3. Remove the screws from the outside of the side plates and loosen set screws.  
Note: These screws may need to be drilled out of the plate. If so use a  $\text{Ø}3/16$  drill.
4. Slide the outside plate apart and remove the remaining parts of the existing fixture.
5. Leave the wiring harness intact for the replacement fixture.  
Note: Existing wiring could be from any of the three tubes.

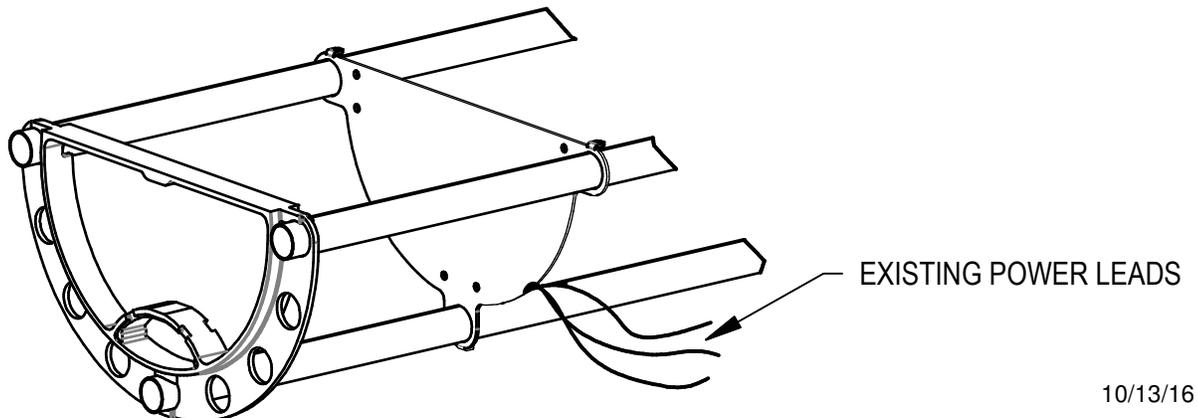

10/13/16  
IS96714X

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.


## LED LIGHTRUSS

PAGE 2 OF 2

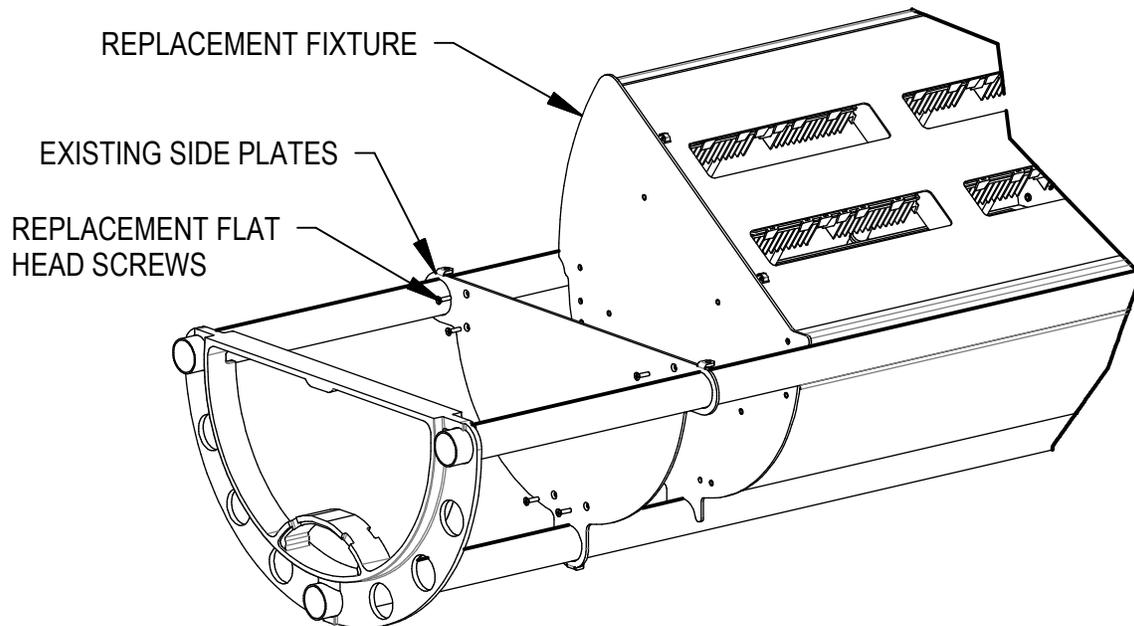

### Steps for installing a replacement fixture:

1. Lower the replacement fixture onto the main tubes.
2. Feed the power leads into the replacement fixture thru the hole located in the bottom of the replacement fixture
3. Slide the existing side plates against the replacement fixture and secure with the provided flat head screws.
4. Open the cover to the power supply box and make any electrical connects per your local codes.
5. Replace the power supply cover.
6. Turn the power back on to the fixture.

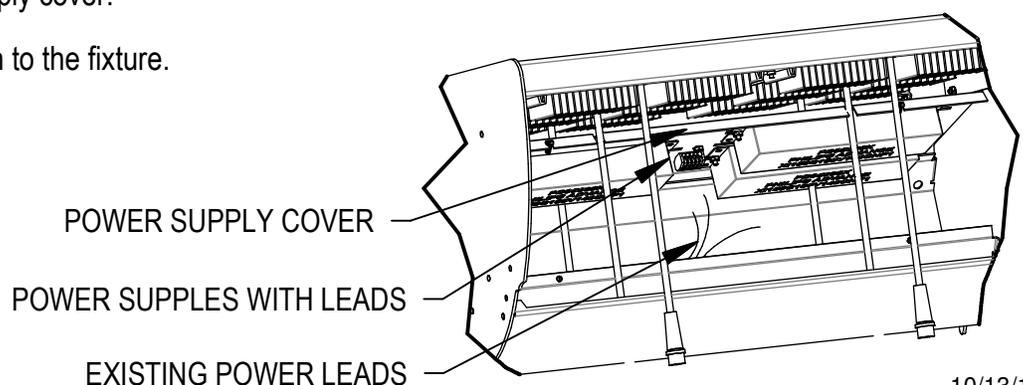

10/13/16  
IS96714X