


SPI LIGHTING ARRAY CANOPY SYSTEM

30+ Standard Configurations | Up to 9 Fixtures | Easy & Fast to Specify

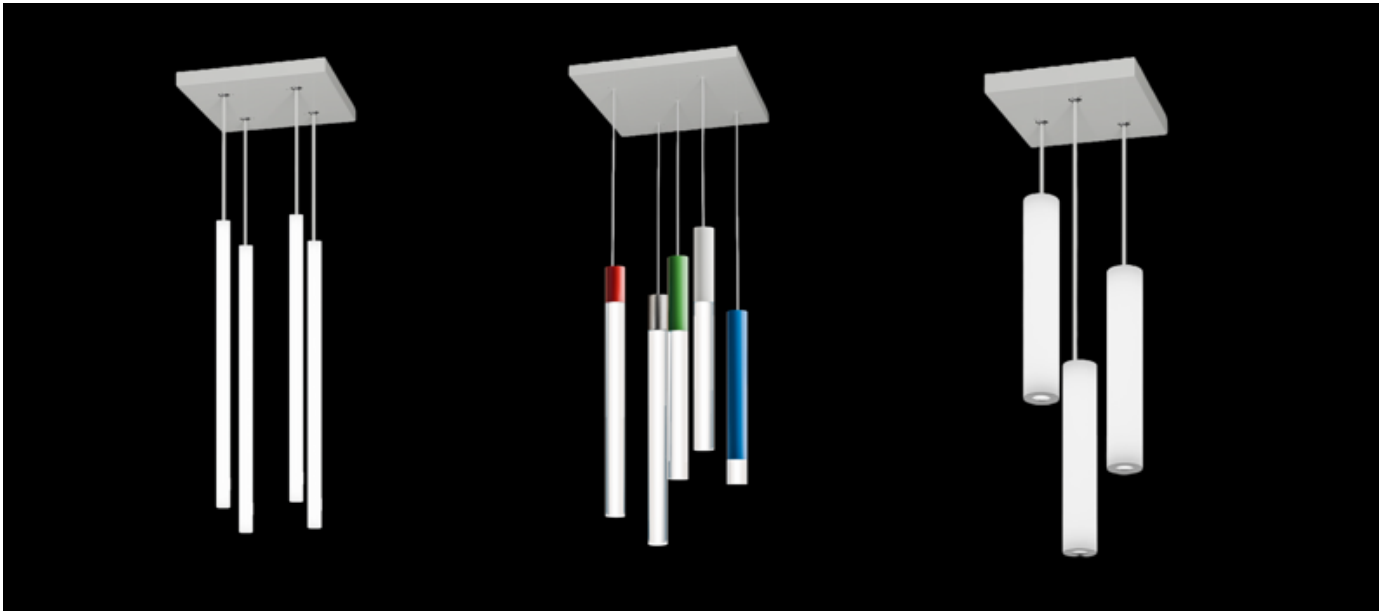

THE FEATURES

30+ standard configurations

Standard ARRAYS up to 9 fixtures

Easy & fast to specify


Stem or cord mount

New versatile, square design

4 PAVO styles to choose from

Pavo Sleek - Pavo 2" - Pavo 4" - Pavo 6"

CONSISTANT FIXTURE SPACING WHEN ADJOINING CANOPIES

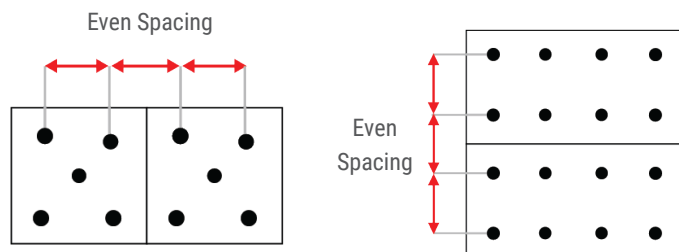

	3 fixtures	4 fixtures	5 fixtures	6 fixtures	7 fixtures	8 fixtures	9 fixtures
ARRAY Canopy System							
PAVO Sleek PAVO 2"	14" x 14"	16" x 16"	18" x 18"	16" x 24"	21" x 21"	16" x 32"	24" x 24"
PAVO 4" PAVO 6"	21" x 21"	24" x 24"	27" x 27"	24" x 36"	32" x 32"	24" x 48"	36" x 36"

ARRAY CANOPY SYSTEM

PAVO SLEEK ARRAYS	Base Wattage		3 Fixture		4 Fixture		5 Fixture		6 Fixture		7 Fixture		8 Fixture		9 Fixture	
Delivered Lumens	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
	10	15	1845	2766	2460	3688	3075	4610	3690	5532	4305	6454	4920	7376	5535	8298

*Multiply base wattage by number of fixtures for total wattage

PAVO 2" ARRAYS	Base Wattage		3 Fixture		4 Fixture		5 Fixture		6 Fixture		7 Fixture		8 Fixture		9 Fixture	
Delivered Lumens	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
1/2 ft	10	na	2787	na	3716	na	4645	na	5574	na	6503	na	7432	na	8361	na
1 ft	8	na	2229	na	2972	na	3715	na	4458	na	6687	na	5944	na	6687	na
2 ft	8	16	2229	4458	2972	5944	3715	7430	4458	8916	5201	10402	5944	11888	6687	13374
3 ft	12	24	3345	6690	4460	8920	5575	11150	6690	13380	7805	15610	8920	17840	10035	20070
4 ft	16	32	4458	8919	5944	11892	7430	14865	8916	17838	10402	20811	11888	23784	13374	26757
6 ft	24	48	6690	13377	8920	17836	11150	22295	13380	26754	15610	31213	17840	35672	20070	40131
8 ft	32	65	8919	18117	11892	24156	14865	30195	17838	36234	20811	42273	23784	48312	26757	54351

*Multiply base wattage by number of fixtures for total wattage

PAVO 4" ARRAYS	Base Wattage		3 Fixture		4 Fixture		5 Fixture		6 Fixture		7 Fixture		8 Fixture		9 Fixture	
Delivered Lumens	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
1 ft	8	na	2655	na	3540	na	4425	na	5310	na	6195	na	7080	na	7965	na
2 ft	11	23	3651	7632	4868	10176	6085	12720	7302	15264	8519	17808	9736	20352	10953	22896
3 ft	19	38	6303	12609	8404	16812	10505	21015	12606	25218	14707	29421	16808	33624	18909	37827
4 ft	26	53	8628	17586	11504	23448	14380	29310	17256	35172	20132	41034	23008	46896	25884	52758
6 ft	42	83	13935	27540	18580	36720	23225	45900	27870	55080	32515	64260	37160	73440	41805	82620
8 ft	na	57	na	18912	na	25216	na	31520	na	37824	na	44128	na	50432	na	56736

*Multiply base wattage by number of fixtures for total wattage

PAVO 6" ARRAYS	Base Wattage		3 Fixture		4 Fixture		5 Fixture		6 Fixture		7 Fixture		8 Fixture		9 Fixture	
Delivered Lumens	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH	LOW	HIGH
1 ft	8	na	2655	na	3540	na	4425	na	5310	na	6195	na	7080	na	7965	na
2 ft	11	23	3651	7632	4868	10176	6085	12720	7302	15264	8519	17808	9736	20352	10953	22896
3 ft	19	38	6303	12609	8404	16812	10505	21015	12606	25218	14707	29421	16808	33624	18909	37827
4 ft	26	53	8628	17586	11504	23448	14380	29310	17256	35172	20132	41034	23008	46896	25884	52758
6 ft	42	83	13935	27540	18580	36720	23225	45900	27870	55080	32515	64260	37160	73440	41805	82620
8 ft	na	57	na	18912	na	25216	na	31520	na	37824	na	44128	na	50432	na	56736

*Multiply base wattage by number of fixtures for total wattage