

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS



**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.


These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## ECHO3.5 VERTICAL STEM MOUNT

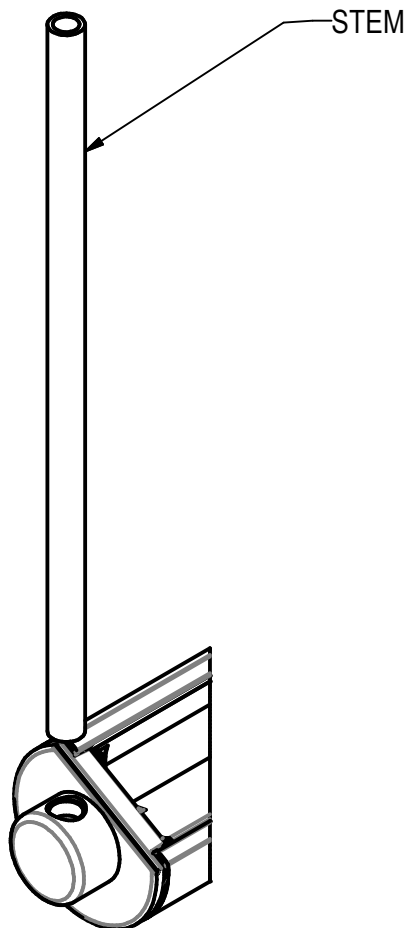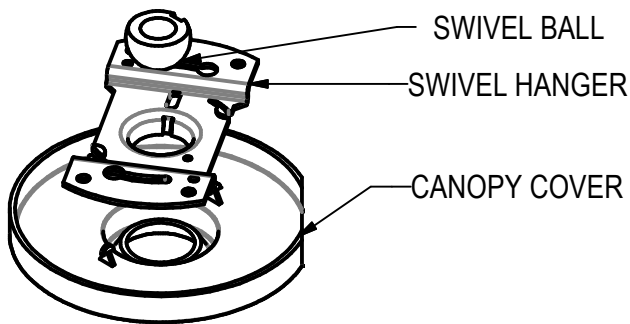

1. FEED WIRES FROM HUB UP THROUGH STEM. TIGHTEN STEM INTO HUB.
2. ASSEMBLE SCREWS (BY OTHERS) TO THE EARS OF THE J-BOX. DO NOT TIGHTEN.
3. FEED WIRES THROUGH CANOPY COVER, SWIVEL HANGER, AND SWIVEL BALL. SLIDE PARTS DOWN STEM, AND SECURE SWIVEL BALL TO TOP OF STEM.
4. TWIST AND LOCK SWIVEL HANGER TO J-BOX, AND SECURE BY TIGHTENING THE SCREWS (BY OTHERS) IN THE J-BOX.
5. MAKE WIRE CONNECTIONS PER CODE.
6. SECURE CANOPY BY PUSHING UPWARD AND TWISTING TO ENGAGE FASTENING DEVICE.

**NOTE:** TO AIM THE FIXTURE, ONCE INSTALLED, LOOSEN THE ROUND HEAD SCREW, APPROX 1/2 TURN, (DO NOT REMOVE THE SCREW) ON THE INSIDE NEAR THE SOCKET, AND THE FIXTURE WILL ROTATE. ONCE IT IS AT DISIRED LOCATION, RE-TIGHTEN THE ROUND HEAD SCREW.

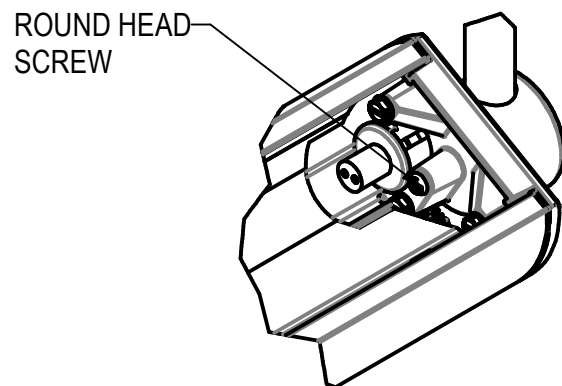

ECHO

**SPI**Lighting

Tel ( 262)-242-1420 FAX: (262)-242- 6414

contact@spilighting.com

11/22/13  
IS43793X