

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.


## ECHO VELOCITY WET LOCATION MOUNTING INSTALLATION

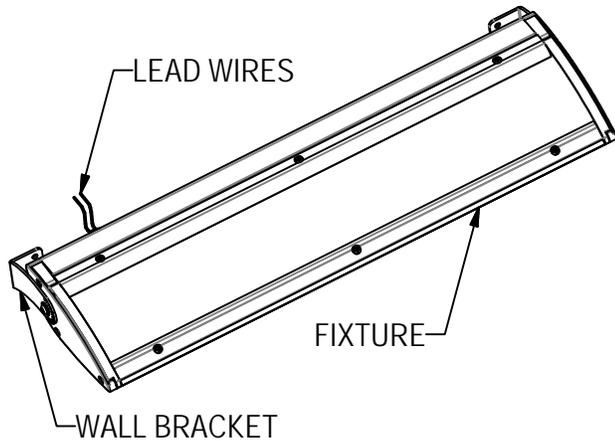

### WALL BRACKET DETAIL

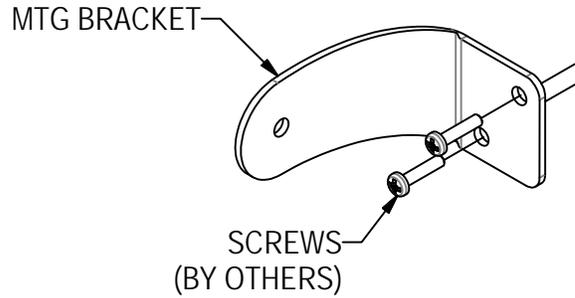

T5 LAMP		T8 LAMP / LED	
SIZE	"A" MTG	SIZE	"A" MTG
2 FT	24 3/16"	1 FT	13 1/2"
3 FT	36"	2 FT	25 1/2"
4 FT	47 7/8"	3 FT	37 1/2"
5 FT	59 5/8"	4 FT	49 1/2"
6 FT	71 7/8"	5 FT	61 1/2"
8 FT	95 1/2"	6 FT	75 1/2"
10 FT	119 1/4"	8 FT	99"
		10 FT	123"

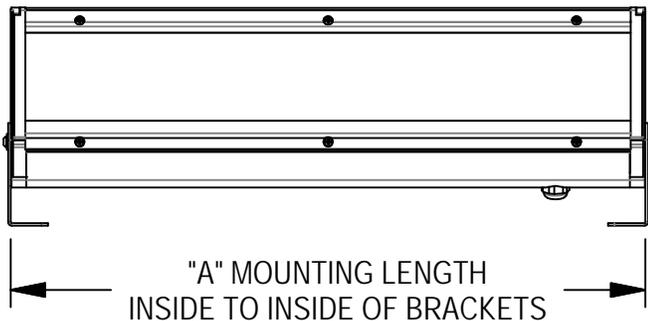

1. REMOVE WALL BRACKETS FROM FIXTURE. (HOUSING NOT SHOWN FOR DETAIL)
2. MOUNT WALL BRACKETS TO WALL WITH HARDWARE (BY OTHERS). SEE CHART FOR MOUNTING DIMENSIONS.
3. ATTACH FIXTURE TO MOUNTING BRACKETS ON BOTH ENDS WITH SCREWS PROVIDED. THERE SHOULD BE A WASHER BETWEEN THE FIXTURE AND YOKE.
4. LEAD WIRES TO BE ROUTED TO A WET LISTED J-BOX (BY OTHERS). MAKE CONNECTIONS PER CODE IN J-BOX. INSTALL J-BOX PER MFG INSTUCTIONS.
5. TO RELAMP, REMOVE SCREWS ALONG LENS. LENS WILL ROTATE FORWARD. (T5/T8 LAMP ONLY)
6. INSTALL LAMP, WHICH MUST BE PER LAMP REPLACEMENT LABEL. (T5/T8 LAMP ONLY)
7. REATTACH ACRYLIC LENS. (T5/T8 LAMP ONLY)

12/20/13  
(REV1)  
IS58617X