

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

PENDANT W/ ANGLED AIRCRAFT CABLE MOUNT

NOTES:

1. ATTACH CANOPY MOUNTING PLATE ASSEMBLY TO J-BOX (BY OTHERS) AND SECURE WITH HARDWARE (BY OTHERS) USING AUXILIARY HOLES PROVIDED. **NOTE: FIXTURE MUST BE SUPPORTED WITH STRUCTURAL MEMBERS (BY OTHERS) IN ADDITION TO J-BOX.**
2. RUN AIRCRAFT CABLES THRU CANOPY MOUNTING BRACKET, CANOPY SPINNING AND INTO GRIPPERS ON FIXTURE SO BALLS ON AIRCRAFT CABLES ARE CAPTURED IN HOLES OF CANOPY MOUNTING BRACKET.
3. RUN POWER CORD THRU FLAT CAP, CANOPY SPINNING, CANOPY MOUNTING BRACKET AND PIPE NIPPLE ON CANOPY MOUNTING PLATE ASSEMBLY.
4. MAKE NECESSARY CONNECTIONS, THEN RAISE CANOPY SPINNING AND SECURE TO PIPE NIPPLE WITH FLAT CAP.
5. RAISE FIXTURE TO DESIRED HEIGHT AND LEVEL.
6. TO RELAMP, REMOVE (2) THUMB NUTS. RAISE FIXTURE HOUSING, TWIST AND LOWER CAREFULLY. ALLOW HOUSING TO HANG ON SAFETY CABLES PROVIDED.

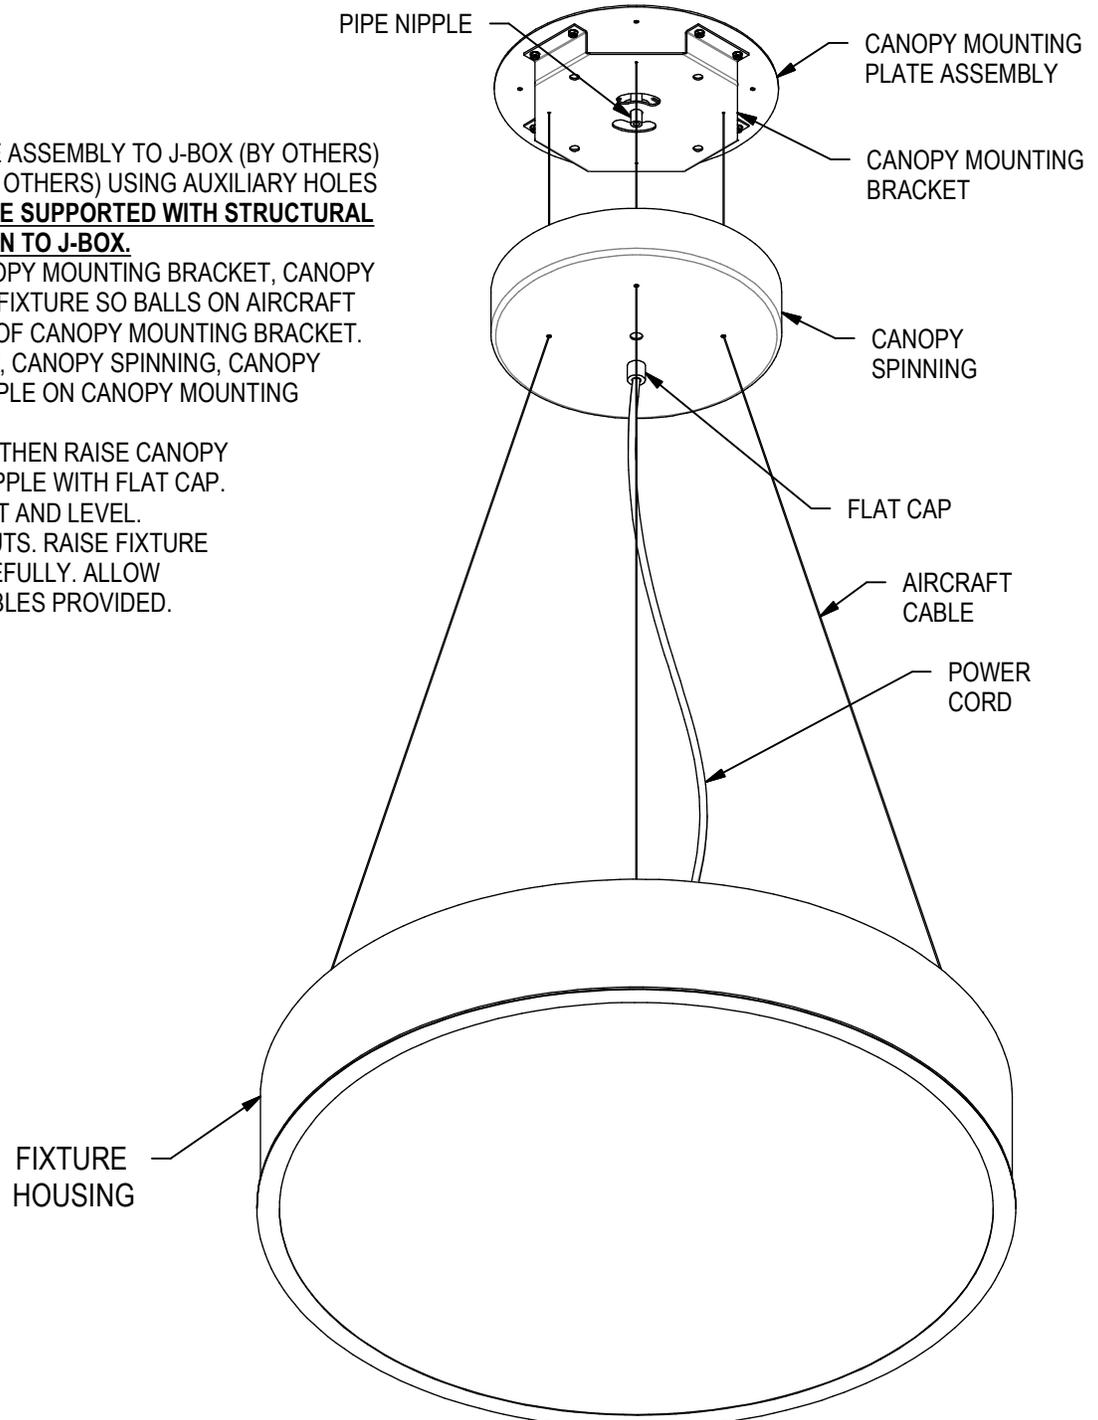

11/25/13
IS78231X