

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## BRIGHTON LED WET LOCATION

### NOTES:

1. REMOVE SCREWS FROM BOTTOM LENS AND PLATE AND SLIDE MAIN LENS OUT OF FIXTURE.
2. MAKE NECESSARY ELECTRICAL CONNECTIONS.  
**\*\*\*NOTE\*\*\* IF FIXTURE HAS INTEGRAL EMERGENCY BATTERY BACKUP, BE SURE TO JOIN EMERGENCY LEAD DISCONNECT BEFORE MOUNTING TO WALL.**
3. MOUNT FIXTURE TO WALL OVER J-BOX USING MOUNTING HOLES AND HARDWARE (BY OTHERS).
4. **\*\*\*CAUTION\*\*\* INSTALLER IS RESPONSIBLE FOR CREATING A WATER TIGHT SEAL BETWEEN WALL AND BACKPLATE. RUN CAULKING AROUND J-BOX OPENING. AFTER MOUNTING FIXTURE TO WALL, RUN CAULKING AROUND PERIMETER OF BACKPLATE.**

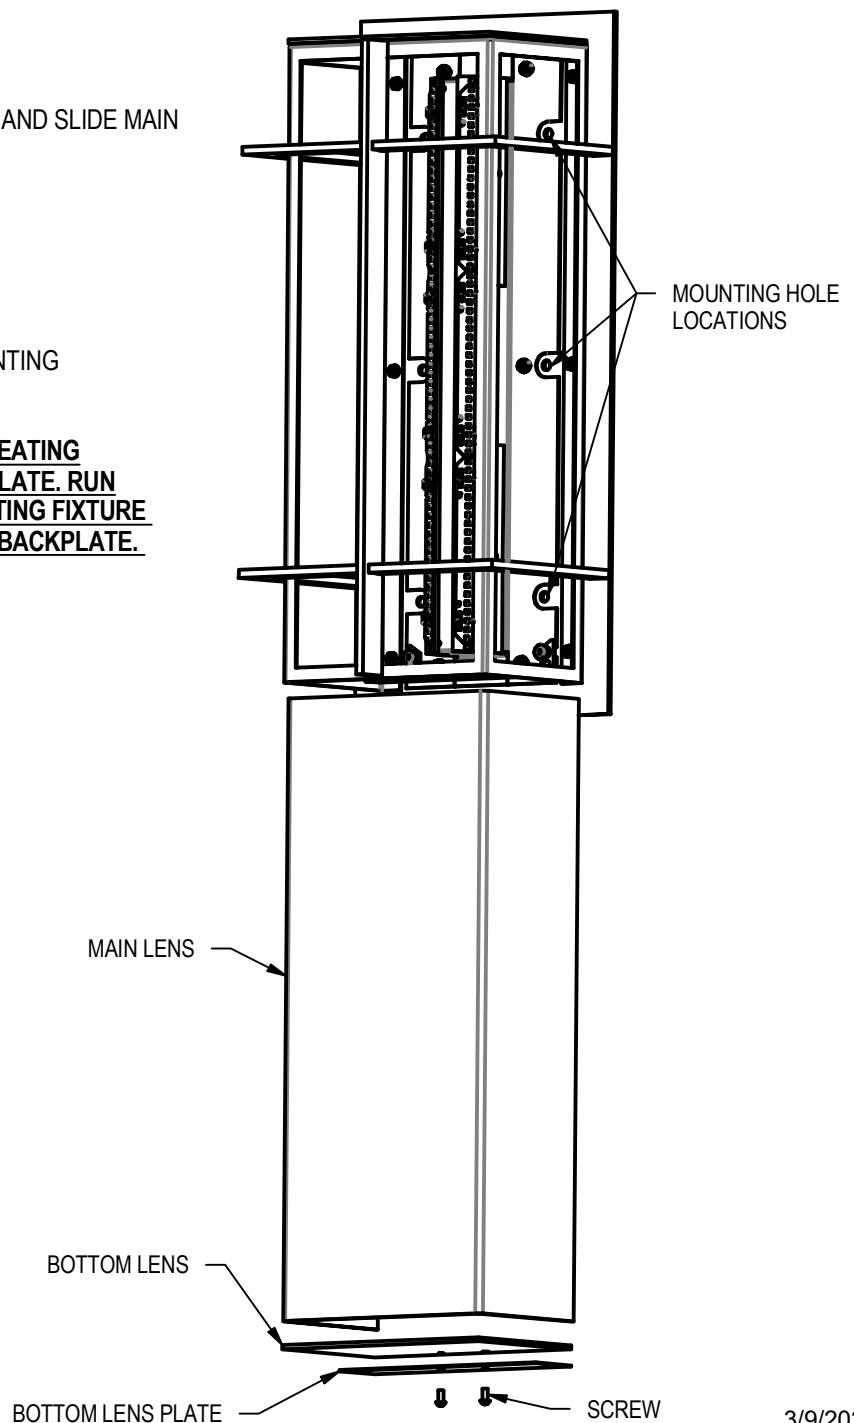

3/9/2020  
IS83617X