


SPI LIGHTING

ECHO BLADE

Micro Max

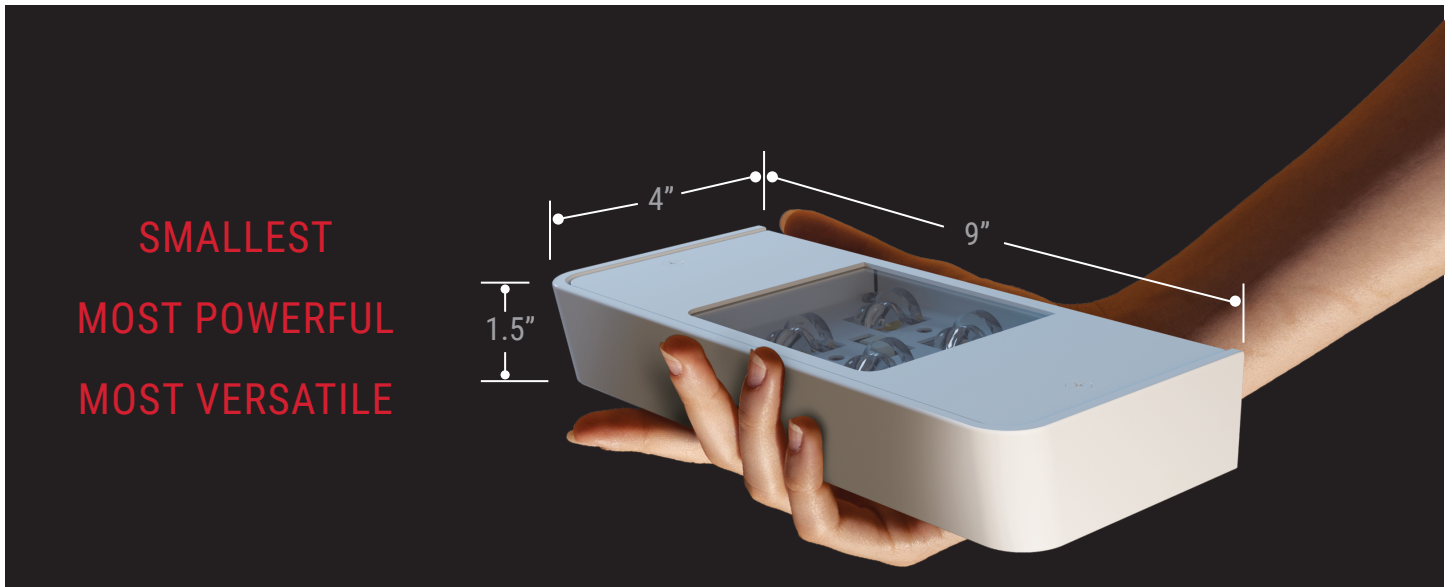

4" x 9" x 1.5" | Up to 5000 lumens | 6 Optical Distributions

THE BASICS

Fixtures	Remote, Integral
Dimensions	ADA compliant: 4" x 9" x 1.5" (Remote) 4"x 9" x 4" (Integral)
Weight	5 lbs
CRI	80+ or 90+
Mountings	Surface mount or yoke mount
Finishes	26 powder coat paint colors and various metal finishes




ECHO BLADE **Micro Max**



Cove Lighting



Troffers



100 ft Corridor Maintain 23 fc at floor (10'W x 10'H)	Fixtures Needed	Light Uniformity (Ceiling)	Aesthetics	Glare	Construction Cost	Installation Cost
ECHOBLADE Micro Max	14	✓	✓	✓	✓	✓
Cove Lighting	200 LF	✓	✓	✓	✗	✗
Troffers	10 2x2	✗	✗	✗	✓	✓

DEEP ASYMMETRIC: LARGER SPACES, GETS MORE LIGHT TO CENTER OF ROOM.

WIDE ASYMMETRIC: CEILING UNIFORMITY, WALL WASH, CLOSER TO CEILING APPLICATIONS.

ULTRA-WIDE ASYMMETRIC: NARROW SPACES, MAXIMIZE FIXTURE SPACING.

DA | DEEP ASYMMETRIC







DAB | DEEP ASYMMETRIC WITH BACKLIGHT SHIELD

WA | WIDE ASYMMETRIC

WAB | WIDE ASYMMETRIC WITH BACKLIGHT SHIELD

UWA | ULTRA WIDE ASYMMETRIC

UWAB | ULTRA WIDE ASYMMETRIC WITH BACKLIGHT SHIELD



LUMEN DATA TABLE

EIW 12398

	L44W					
	DA	DAB	WA	WAB	UWA	UWAB
LUMENS	4932	3758	4479	3216	4699	3617
EFFICACY	112	85	102	73	107	82

L22W

	DA	DAB	WA	WAB	UWA	UWAB
LUMENS	2466	1879	2240	1608	2350	1808
EFFICACY	112	85	102	73	107	82

EIW 12399

	L44W					
	DA	DAB	WA	WAB	UWA	UWAB
LUMENS	4932	3758	4479	3216	4699	3617
EFFICACY	112	85	102	73	107	82

	L22W					
	DA	DAB	WA	WAB	UWA	UWAB
LUMENS	2466	1879	2240	1608	2350	1808
EFFICACY	112	85	102	73	107	82

	L12W					
	DA	DAB	WA	WAB	UWA	UWAB
LUMENS	1345	1025	1222	877	1282	986
EFFICACY	112	85	102	73	107	82