

Sebring Exterior - Double Bars

SPILIGHTING

PROJECT DETAILS

AEW9905 17.70 in

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

The Sebring is a wet location, ADA compliant sconce providing a path of egress lighting with sophisticated style. Color gels can add a vivid splash of color to complement our palette of powder coat or metal finishes. Sebring enhances a project by allowing design continuity, inside and out.

FEATURES & BENEFITS

- Solid metal accents add high-quality, decorative element to fixture
- Add a splash of color to a space with optional theatrical color gels (offered in five standard colors with custom colors available upon request)
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA


SPECIFICATIONS

- **LIGHT SOURCE:** IP66 white LED light engine or incandescent
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **LENS:** Top and bottom glass lens standard with any LED module
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable. Flush front.



- **FINISH:** The face plate is aluminum and available in brushed or painted finishes. Accents are available in brushed brass or can be painted.
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US and Canada) for use in wet locations

DIMENSIONS

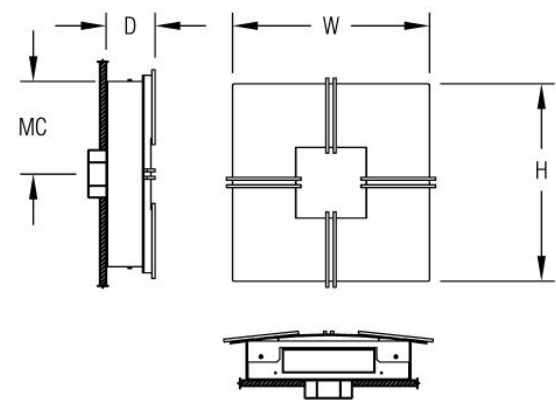

W	H	D	MC
17.7 in 45 cm	17.7 in 45 cm	4 in 10.2 cm	8.8 in 22.4 cm
Mounting Weight Approximate: 25 lb (12 kg)			

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AEW9905. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog AEW9905	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Emergency	Accents*	Color Accents*
							Finish:	
	A		B	C	D	E	F	G

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐
L29W | White 29W LED Light Engine

Delivered Lumens: 833
- ☐
L14W | White 14W LED Light Engine

Delivered Lumens: 416
- ☐
2N75 ¹ | 2INC75W/A19
- ☐
Cust_Out |

Lumen Calculator: Enter Lumens or Watts if different than displayed

LU

Min 406 - Max 841

W

Min 14.0 - Max 29.0

See last page for finish options

¹Incandescent Lamp(s) Not Included
*For requests outside Min-Max range, please contact factory.

B - VOLTAGE *

- ☐ 120-277V | Universal Voltage
☐ 120V ² | 120 Volt

² For incandescent light source only

C - LAMP OPTIONS *

Apply multiplier from chart for delivered lumens at other CCT's and CRI's. Not required with incandescent.

- ☐ 2700K | 2700K CCT
☐ 3000K | 3000K CCT
☐ 3500K | 3500K CCT
☐ 4000K | 4000K CCT
☐ 5000K | 5000K CCT

D - CRI *

- ☐ DF_90+HE | 90+ High Efficacy

E - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- ☐ EMR-DAMP | Emergency Battery Remote - Damp Location

F - ACCENTS *

- ☐ ACC | Decorative Accents (See last page for finish options)

G - COLOR ACCENTS *

Contact factory to customize a color gel that coordinates with your application.

- ☐ CG00 | White Color Gel
☐ CG01 | Red Color Gel
☐ CG02 | Orange Color Gel
☐ CG03 | Green Color Gel
☐ CG04 | Blue Color Gel



Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT67 RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57 RAL1015 Light Ivory (Textured)	PT58 RAL8004 Copper Brown (Textured)	PT59 RAL6021 Pale Green (Textured)	PT60 RAL1019 Grey Beige (Textured)	PT61 RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Brushed Aluminum

BAL Brushed Aluminum

Brushed Brass

BBR Brushed Solid Brass

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.