Dublin - Ceiling

AIC8888 33.20 in

SPI LIGHTING
PROJECT DETAILS

JOB NAME:
TYPE:
NOTES:

DESCRIPTION

Our acorn collection was inspired by the need to offer proven optical solutions within adaptive re-use, traditional, and historically significant applications. The acorn shaped luminaire provides a more architecturally significant style for these facilities while offering impressive performance. Often dark wood and metal finishes are combined with high ceilings in these environments and require efficient high-output solutions. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance your next visual challenge in this type of environment.

FEATURES & BENEFITS

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine or incandescent
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT**: Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** LED versions feature integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- **DIFFUSER:** Opal acrylic is standard; matte acrylic and hand

painted lenses optional

- **MOUNTING:** Aluminum cover fits over a standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

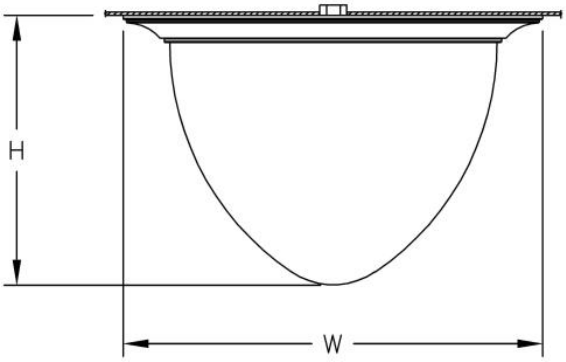

W	H
33.2 in 84.3 cm	21.5 in 54.6 cm

Mounting Weight
Approximate: 50 lb (23 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIC8888. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Emergency	Bowl Options	Options
AIC8888									
								Finish:	
	A		B	C	D	E	F	G	H

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐ **L86W |** White 86W LED Light Engine | Delivered Lumens: 4,428
- ☐ **L43W |** White 43W LED Light Engine | Delivered Lumens: 2,214
- ☐ **Cust_Out |**

Lumen Calculator: Enter Lumens or Watts if different than displayed

LU Min 2189 - Max 4377

W Min 43.0 - Max 86.0

See last page for finish options

*For requests outside Min-Max range, please contact factory.

B - VOLTAGE *

- ☐ 120-277V | Universal Voltage

C - LAMP OPTIONS *

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

D - CRI *

- ☐ DF_90+HE | 90+ High Efficacy

E - DIFFUSER *

- ☐ DF_OA | Opal Acrylic Diffuser Lens (default)
- ☐ HP01 | Silver Hand Painted Acrylic Diffuser
- ☐ HP02 | Beige Hand Painted Acrylic Diffuser
- ☐ HP03 | Amber Hand Painted Acrylic Diffuser
- ☐ MA01 | Matte Acrylic Diffuser Lens


OA

HP01

HP02

HP03

MA01

F - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ EMR | Emergency Battery Remote

G - BOWL OPTIONS

- ☐ FIN | Finial (See last page for finish options)

H - OPTIONS

- ☐ F | Fusing

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01
RAL9003 Signal White (Gloss)

PT51
Matte White (Textured)

PT02
White (Textured)

PT04
RAL9001 Cream (Textured)

PT67
RAL7044 Silk Grey (Textured)

PT53
RAL7035 Light Grey (Textured)

PT54
RAL7037 Dusty Grey (Textured)

PT55
RAL7012 Basalt Grey (Textured)

PT56
RAL7016 Anthracite Grey (Textured)

PT11
Black (Textured)

PT57
RAL1015 Light Ivory (Textured)

PT58
RAL8004 Copper Brown (Textured)

PT59
RAL6021 Pale Green (Textured)

PT60
RAL1019 Grey Beige (Textured)

PT61
RAL7006 Beige Grey (Textured)

PT62
RAL1003 Signal Yellow (Textured)

PT63
RAL3001 Signal Red (Textured)

PT64
RAL6001 Emerald Green (Textured)

PT65
RAL5005 Signal Blue (Textured)

PT66
RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22
Platinum (Metallic Gloss)

PT48
Brass (Metallic Textured)

PT28
Dark Stainless (Metallic Gloss)

PT49
Bronze (Metallic Textured)

PT32
Dark Bronze (Metallic Gloss)

PT46
Aluminum (Metallic Textured)

Brushed Aluminum

BAL
Brushed Aluminum

Brushed Brass

BBR
Brushed Solid Brass

Polished-Tinted Brass

ATBR
Antique Tinted Brass

DTBR
Dark Tinted Brass

PBR
Polished Brass

Plated Steel

ANST
Antique Brass Plated Steel

BBST
Brushed Brass Plated Steel

CPST
Chrome Plated Steel

PBST
Polished Brass Plated Steel

SNST
Satin Nickel Steel

Polished Plated Brass

CPBR
Chrome Plated Polished Brass

SNBR
Satin Nickel Plated Brass

Specialty Finishes

More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.